

BookletChart™




St. Andrew Sound and Satilla River


NOAA Chart 11504

A reduced-scale NOAA nautical chart for small boaters

When possible, use the full-size NOAA chart for navigation.

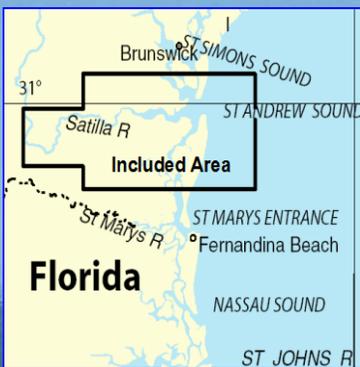

- Complete, reduced-scale nautical chart
- Print at home for free
- Convenient size
- Up-to-date with Notices to Mariners
- Compiled by NOAA's Office of Coast Survey, the nation's chartmaker

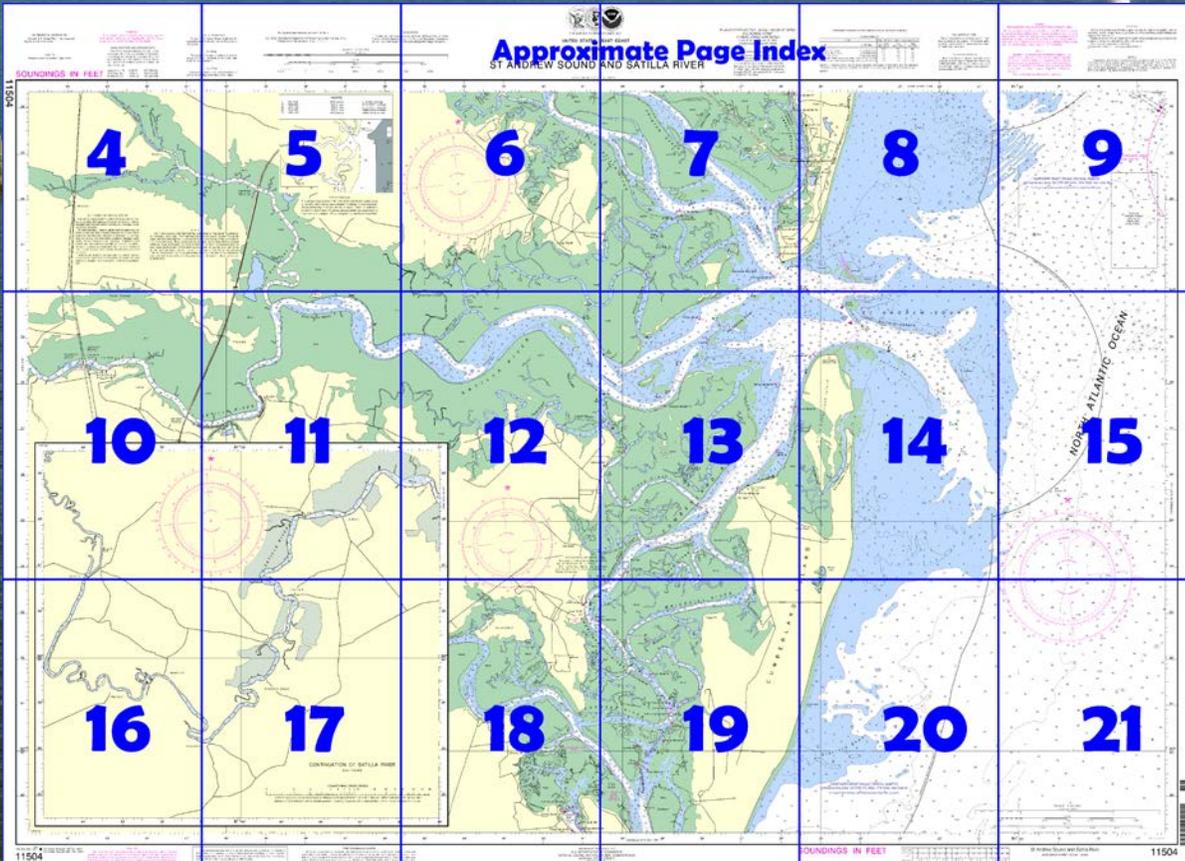

**Published by the
National Oceanic and Atmospheric Administration
National Ocean Service
Office of Coast Survey
www.NauticalCharts.NOAA.gov
888-990-NOAA**

What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

What is a BookletChart™?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.


Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at <http://www.NauticalCharts.NOAA.gov>.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.

For latest Coast Pilot excerpt visit the Office of Coast Survey website at <http://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=11504>

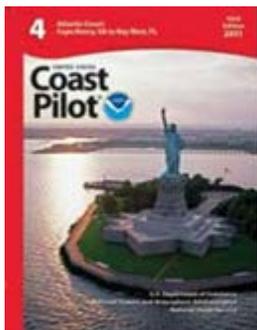

(Selected Excerpts from Coast Pilot)

Jekyll Island is a State Park; several large park buildings, formerly private homes, are on the west side of the island, and on the east side are large motels and recreational buildings, bath houses, and the large prominent Aquarama (a large indoor swimming pool and auditorium). Several fishhavens are within 13 miles east and southeast of Jekyll Island. Shoals extend 3 to 5 miles offshore.

St. Andrew. The entrance to the sound is over a shifting bar that extends 5 miles offshore. Vessels should stay in 5 fathoms or more until the outer buoy is sighted. The channel into the sound is marked by buoys. Vessels with a draft of 10 feet should have

little difficulty entering the sound. The depth was 12 feet in the buoyed entrance channel. The entrance is used only by local shrimp boats. A sunken wreck was reported 1.9 miles east of the abandoned lighthouse in about 30°58'32"N., 81°22'37"W.

In the sound are extensive shoals, between which channels lead to the principal tributaries: Jekyll Sound on the north, Satilla River on the west, and Cumberland River on the south.

Little Satilla River with local knowledge about 10 feet could be taken from the entrance to Fancy Bluff Creek. Small craft going to landings on the river enter from South Brunswick River through Fancy Bluff Creek.

St. Andrew Sound, between Jekyll Island and Little Cumberland Island, is about 7 miles southward of St. Simons Sound and 17 miles northward of St. Marys Entrance.

The entrance to the sound is over a shifting bar which extends about 5 miles offshore. Vessels should stay in 5 fathoms or more until the outer buoy is sighted. The channel into the sound is marked by buoys. Vessels with a draft of about 10 feet should have little difficulty entering the sound. In May 1983, the reported controlling depth was 12 feet in the buoyed entrance channel.

In the sound are extensive shoals, between which channels lead to the principal tributaries: Jekyll Sound on the north, Satilla River on the west, and Cumberland River on the south.

Currents.—The current velocity is about 2 knots in the entrance; predictions are given in the Tidal Current Tables.

The best anchorage in the sound is in the channel on the western side of Little Cumberland Island. The anchorage has depths of 17 to 27 feet with good holding ground. Good anchorage is also found in the entrance of Jekyll Point.

Satilla River enters St. Andrew Sound from the westward through a narrow channel in the shoals. In 1963 and May 1975, shoaling to 1 foot was reported to exist just below the bend 9 miles above the entrance.

Satilla River Marsh Island Natural Area, a Marine Protected Area (MPA), is about 1.5 miles upstream of St. Andrews Sound on the S bank of the Satilla River. (See Appendix C for additional information.) Shrimp boats going to **Woodbine**, 22 miles above the mouth, use Bailey Cut, which was reported to have a controlling depth of about 4 feet, in May 1983, at its eastern entrance. The river is crossed by twin fixed highway bridges with clearances of 44 feet about 19.2 miles above the mouth. U.S. Route 17 highway bridge at Woodbine has a fixed span with a clearance of 43 feet. The Seaboard System Railroad (SCL) bridge adjacent to the westward has a swing span with a clearance of 5 feet. (See **117.1 through 117.59 and 117.369**, chapter 2, for drawbridge regulations.) Overhead power cables are 0.8 mile and 0.5 mile east of the bridges. The easternmost cable has a clearance of 57 feet, and clearance for the other cable is not known. The overhead power cable between the bridges has a clearance of 61 feet.

The mean range of tide is 6.7 feet about 5 miles above the mouth and 3.2 feet at Burnt Fort. The freshet variation at **Waycross**, 142 miles above the mouth, is about 12 feet. There is reported to be no appreciable rise at Woodbine during freshets.

**U.S. Coast Guard Rescue Coordination Center
24 hour Regional Contact for Emergencies**

RCC Miami Commander
7th CG District (305) 415-6800
Miami, FL

Table of Selected Chart Notes

Corrected through NM Jun. 25/11
Corrected through LNM Jun. 21/11

HEIGHTS

Heights in feet above Mean High Water.

For Symbols and Abbreviations see Chart No. 1

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

INTRACOASTAL WATERWAY

The project depth from St Simons Sound, GA., to Fort Pierce, FL, is 12 feet. The controlling depths are published periodically in the U.S. Coast Guard Local Notice to Mariners.

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.842' northward and 0.644' westward to agree with this chart.

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

CAUTION

Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Jacksonville, FL	KHB-39	162.550 MHz
Waycross, GA	WXK-75	162.475 MHz
Brunswick, GA	WWH-39	162.425 MHz

CAUTION

SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:



Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.

Covered wells may be marked by lighted or unlighted buoys.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 4. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 7th Coast Guard District in Miami, Florida, or at the Office of the District Engineer, Corps of Engineers in Savannah, Georgia.

Refer to charted regulation section numbers.

HURRICANES AND TROPICAL STORMS

Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations.

Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved.

Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard, and National Geospatial-Intelligence Agency.

NOTE B

RECOMMENDED WHALE AVOIDANCE PRECAUTIONARY AREA

The precautionary area shown on this chart is RECOMMENDED for use by all vessels traveling within its limits. This precautionary area has been established to reduce the likelihood of ship strikes of endangered North Atlantic right whales. CAUTION: Full bottom coverage surveys have not been conducted within the precautionary area, so uncharted dangers may exist. See Source Diagram and Chapter 1, U.S. Coast Pilot.

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

MERCATOR PROJECTION, SCALE 1:40,000 AT 30°58'
SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER
North American Datum of 1983
(World Geodetic System 1984)

COLREGS: International Regulations for Preventing Collisions at Sea, 1972.
Demarcation lines are shown thus: - - - - -

CAUTION

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117.

Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.

Station positions are shown thus:

○ (Accurate location) ◐ (Approximate location)

NOTE X

Within the 12-nautical mile Territorial Sea, established by Presidential Proclamation, some Federal laws apply. The Three Nautical Mile Line, previously identified as the outer limit of the territorial sea, is retained as it continues to depict the jurisdictional limit of the other laws. The 9-nautical mile Natural Resource Boundary off the Gulf coast of Florida, Texas, and Puerto Rico, and the Three Nautical Mile Line elsewhere remain in most cases the inner limit of Federal fisheries jurisdiction and the outer limit of the jurisdiction of the states. The 24-nautical mile Contiguous Zone and the 200-nautical mile Exclusive Economic Zone were established by Presidential Proclamation. Unless fixed by treaty or the U.S. Supreme Court, these maritime limits are subject to modification.

NOTE S

Regulations for Ocean Dumping Sites are contained in 40 CFR, Parts 220-229. Additional information concerning the regulations and requirements for use of the sites may be obtained from the Environmental Protection Agency (EPA). See U.S. Coast Pilots appendix for addresses of EPA offices. Dumping subsequent to the survey dates may have reduced the depths shown.

TIDAL INFORMATION

PLACE	PLACE	Height referred to datum of soundings (MLLW)		
		Mean Higher High Water	Mean High Water	Mean Low Water
NAME	(LAT/LONG)	feet	feet	feet
Burnt Fort, Satilla River	(30°57'N/81°54'W)	3.5	3.3	0.1
Dover Bluff, Dover Creek	(31°1'N/81°32'W)	7.6	7.2	0.2
Ceylon, Satilla River	(30°58'N/81°39'W)	7.2	6.8	0.2
Cumberland Wharf, Cumberland River	(30°55.8'N/81°26.6'W)	7.4	7.0	0.2
Crooked River, Cumberland Dividings	(30°50.6'N/81°29.2'W)	7.4	7.0	0.2

Dashes (- - -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the internet from <http://tidesandcurrents.noaa.gov>.

(Jun 2011)

CAUTION
Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

AIDS TO NAVIGATION
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 4 for important supplemental information.

HEIGHTS
Heights in feet above Mean High Water.

CAUTION
Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOAA WEATHER RADIO BROADCASTS
The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Jacksonville, FL	KHB-39	162.550 MHz
Waycross, GA	WXK-75	162.475 MHz
Brunswick, GA	WWH-39	162.425 MHz


CAUTION
SUBMARINE PIPELINES AND CABLES
Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:



Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling. Covered wells may be marked by lighted or unlighted buoys.

SOUNDINGS IN FEET

11504

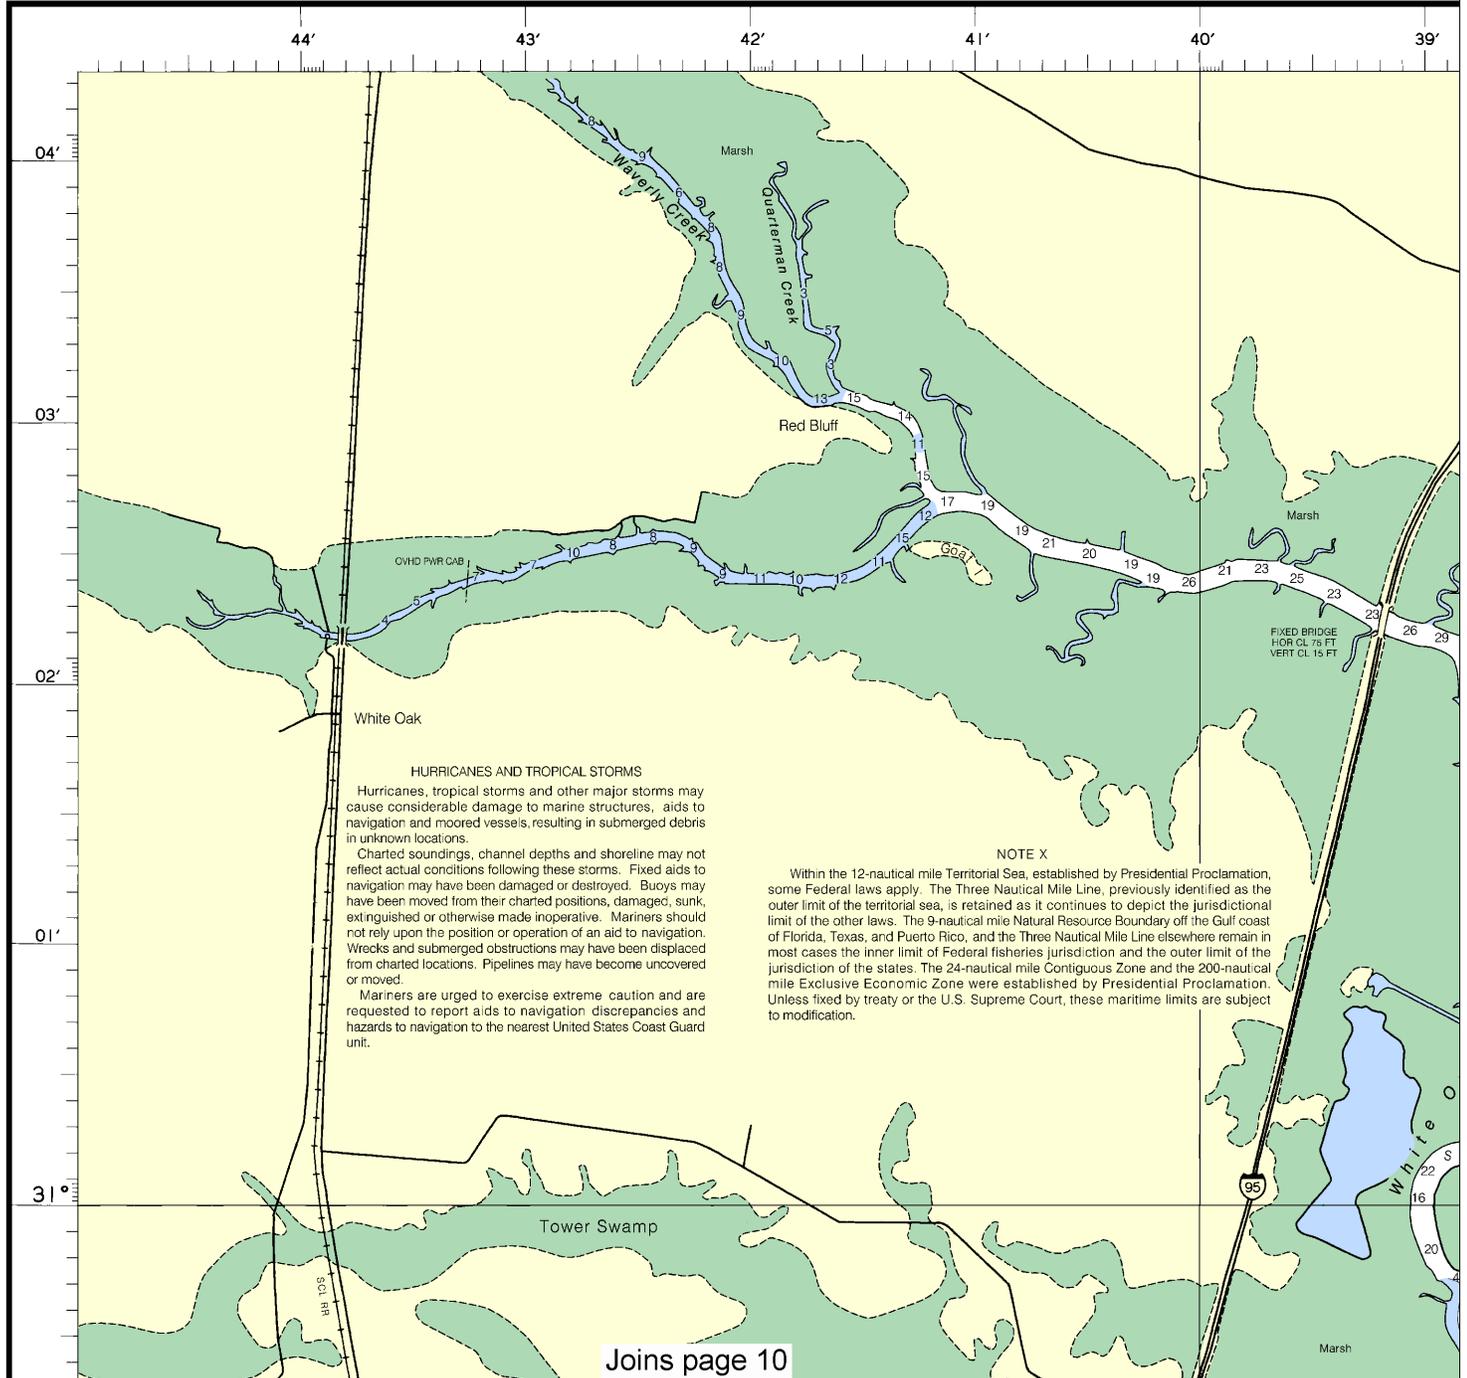

Joins page 10

4

Note: Chart grid lines are aligned with true north.

Printed at reduced scale.

SCALE 1:40,000
Nautical Miles

See Note on page 5.



For Symbols and Abbreviations see Chart No. 1


REGS: International Regulations for Preventing Collisions at Sea, 1972.
Demarcation lines are shown thus: 

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard, and National Geospatial-Intelligence Agency.


SCALE 1:40,000

Nautical Miles

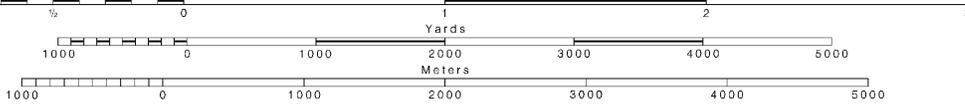


ST ANDRE

SOURCE		
A	1990-1998	NOS Surveys full bottom coverage
B1	1990-2000	NOS Surveys partial bottom coverage
B2	1970-1989	NOS Surveys partial bottom coverage
B3	1940-1969	NOS Surveys partial bottom coverage
B4	1900-1939	NOS Surveys partial bottom coverage

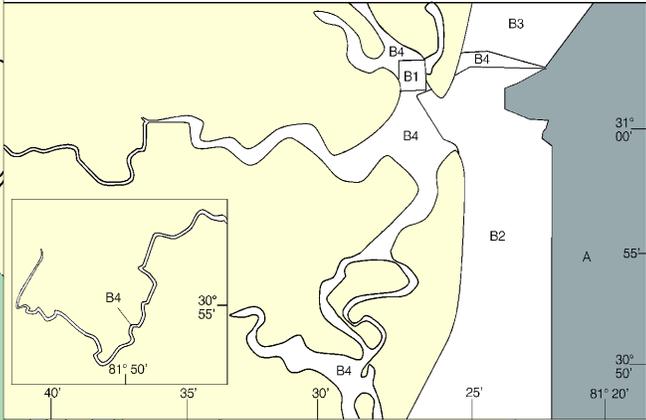

SOURCE DIAGRAM
The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

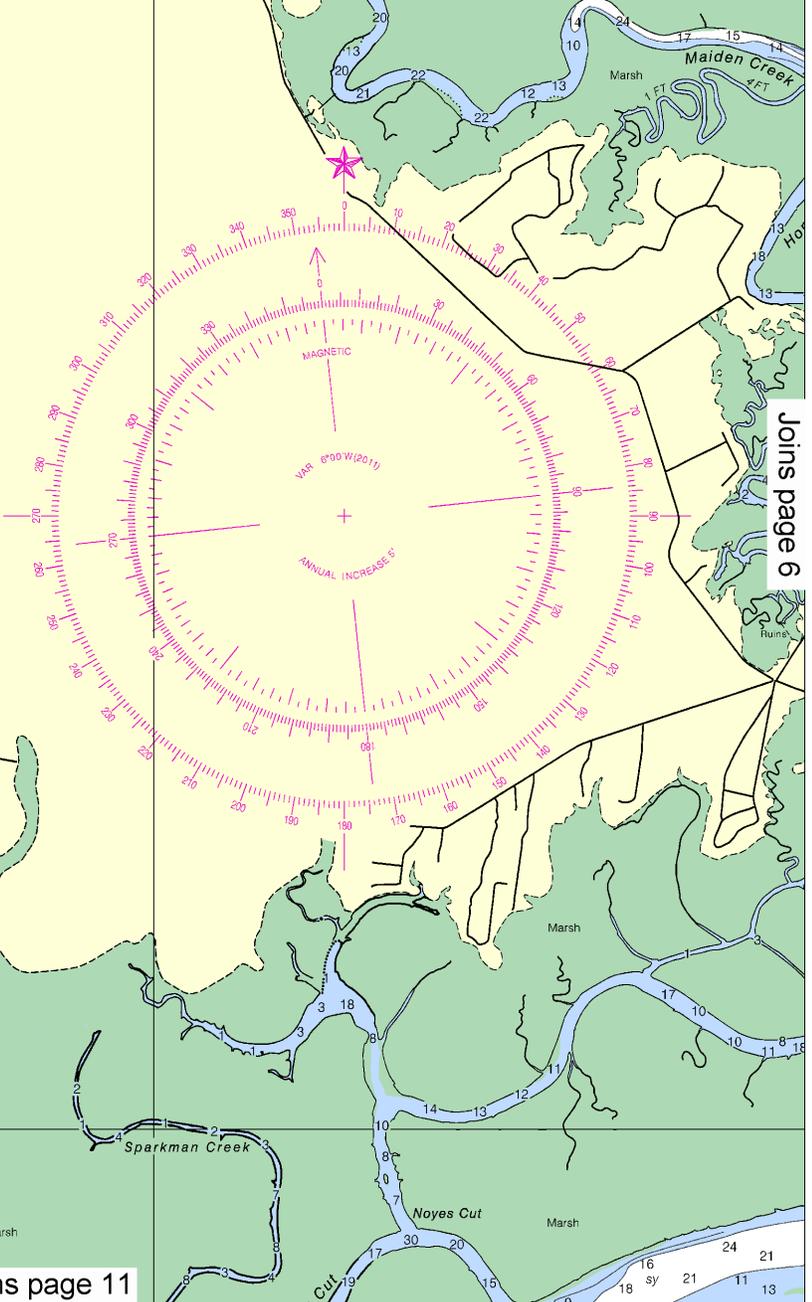

Joins page 6

Joins page 11

This BookletChart was reduced to 75% of the original chart scale.
The new scale is 1:53333. Barscales have also been reduced and are accurate when used to measure distances in this BookletChart.






THE NATION'S CHARTMAKERS

UNITED STATES - GEORGIA


AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, U.S. Coast Guard, and National Geospatial-Intelligence Agency.

SCALE 1:40,000
Nautical Miles

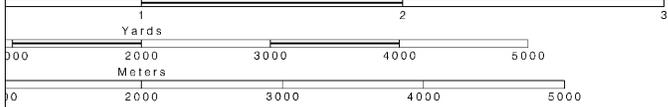


ST ANDREW SOUND


Formerly C&GS 448, 1st Ed., June 1972



SOURCE
OS Surveys full bottom coverage
OS Surveys partial bottom coverage

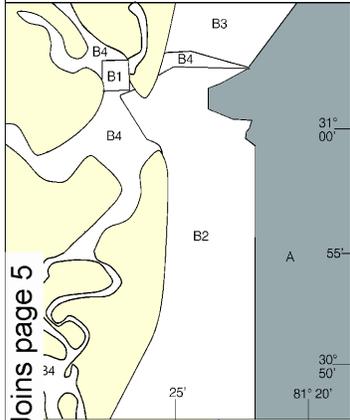

SOURCE DIAGRAM
The limits of the most recent hydrographic data are shown. Surveys have been evaluated for charting. Surveys have been evaluated for charting.

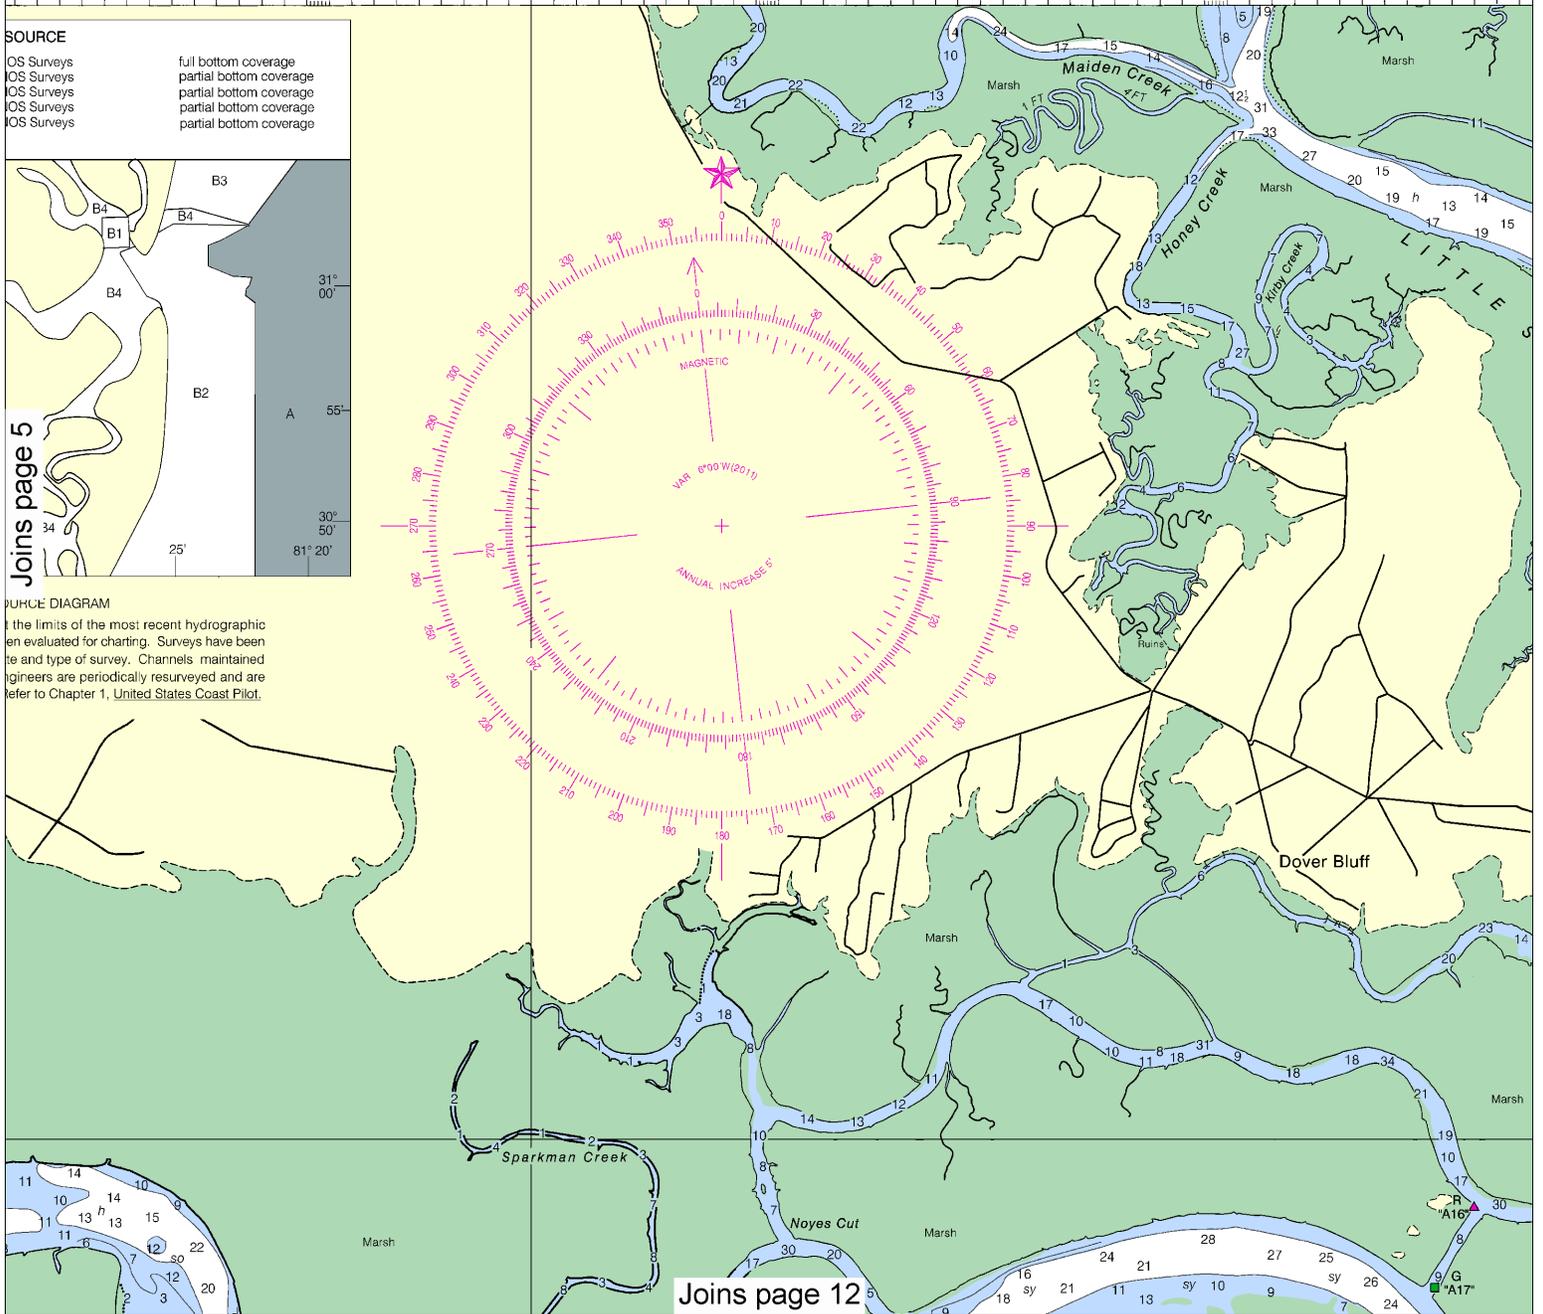

6

Note: Chart grid lines are aligned with true north.

Printed at reduced scale.

SCALE 1:40,000
Nautical Miles

See Note on page 5.





NOAA
NATIONAL OCEANOGRAPHIC AND ATMOSPHERIC ADMINISTRATION
U.S. DEPARTMENT OF COMMERCE

ESTABLISHED 1807
EAST COAST

NOAA

SATILLA RIVER AND SATILLA RIVER

Line 1875 KAPP 255

MERCATOR PROJECTION, SCALE 1:40,000 AT 30°58'
SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER
North American Datum of 1983
(World Geodetic System 1984)


Additional information can be obtained at nauticalcharts.noaa.gov.

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.842" northward and 0.644" westward to agree with this chart.

NAME	PLACE	(LAT, LON)
Burnt Fort, Satilla River		(30°57'N)
Dover Bluff, Dover Creek		(31°1'N)
Ceylon, Satilla River		(30°58'N)
Cumberland Wharf, Cumberland River		(30°55.8'N/81°00.0'W)
Crooked River, Cumberland Dividings		(30°50.6'N/81°00.0'W)

Dashes (- - -) located in datum columns indicate unavailable tide predictions, and tidal current predictions are available (Jun 2011)

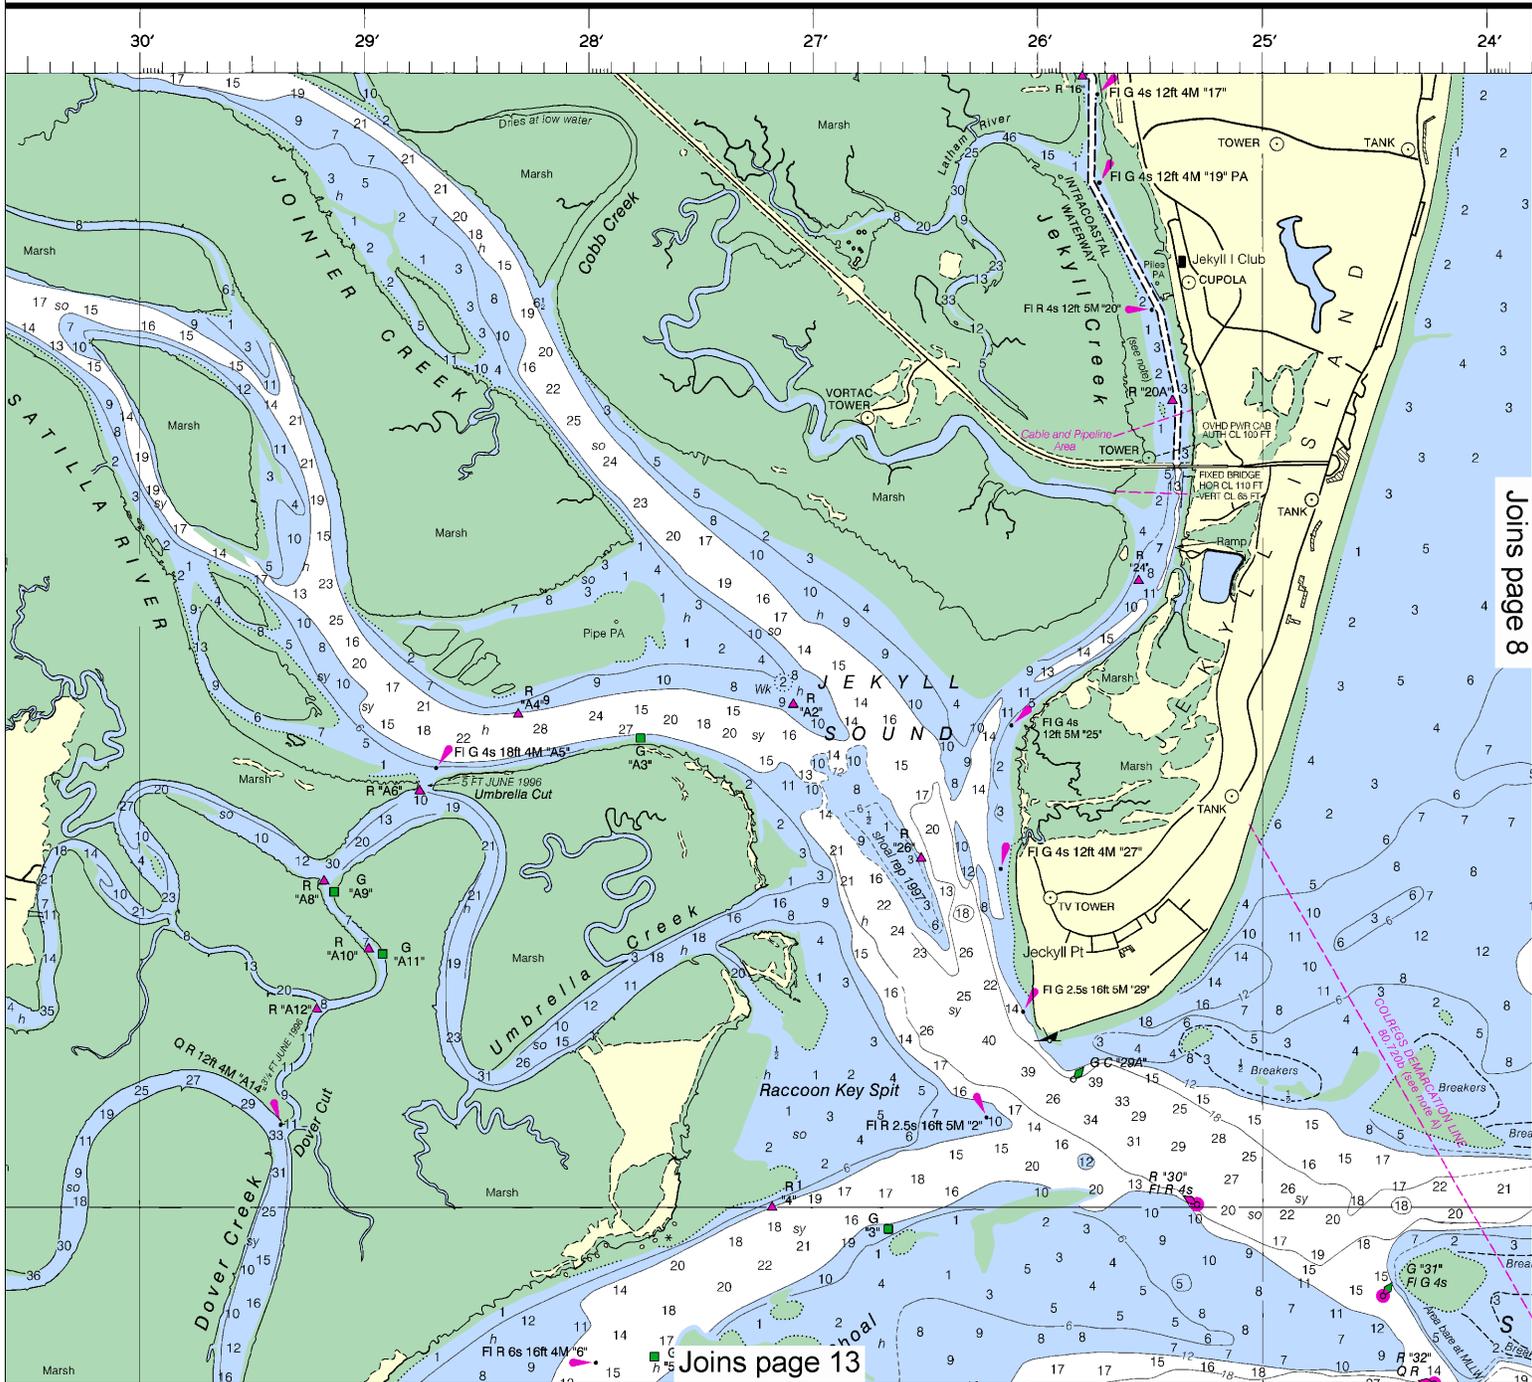

Joins page 8

Joins page 13

This BookletChart has been updated through: Coast Guard Local Notice To Mariners: 0313 1/15/2013, NGA Weekly Notice to Mariners: 0413 1/26/2013, Canadian Coast Guard Notice to Mariners: n/a.



MERCATOR PROJECTION, SCALE 1:40,000 AT 30°58'
 SOUNDINGS IN FEET
 AT MEAN LOWER LOW WATER
 North American Datum of 1983
 (World Geodetic System 1984)

Additional information can be obtained at nauticalcharts.noaa.gov.

HORIZONTAL DATUM


The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.842" northward and 0.644" westward to agree with this chart.

TIDAL INFORMATION

PLACE	NAME	(LAT/LONG)	Height referred to datum of soundings (MLLW)		
			Mean Higher High Water	Mean High Water	Mean Low Water
Burnt Fort, Sailla River		(30°57'N/81°54'W)	feet	feet	feet
Dover Bluff, Dover Creek		(31°1'N/81°32'W)	3.5	7.2	0.1
Ceylon, Sailla River		(30°58'N/81°39'W)	7.6	6.8	0.2
Cumberland Wharf, Cumberland River		(30°55.8'N/81°26.8'W)	7.4	7.0	0.2
Crooked River, Cumberland Dividings		(30°50.6'N/81°29.2'W)	7.4	7.0	0.2

Dashes (---) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from <http://tidesandcurrents.noaa.gov>. (Jun 2011)

A RIVER

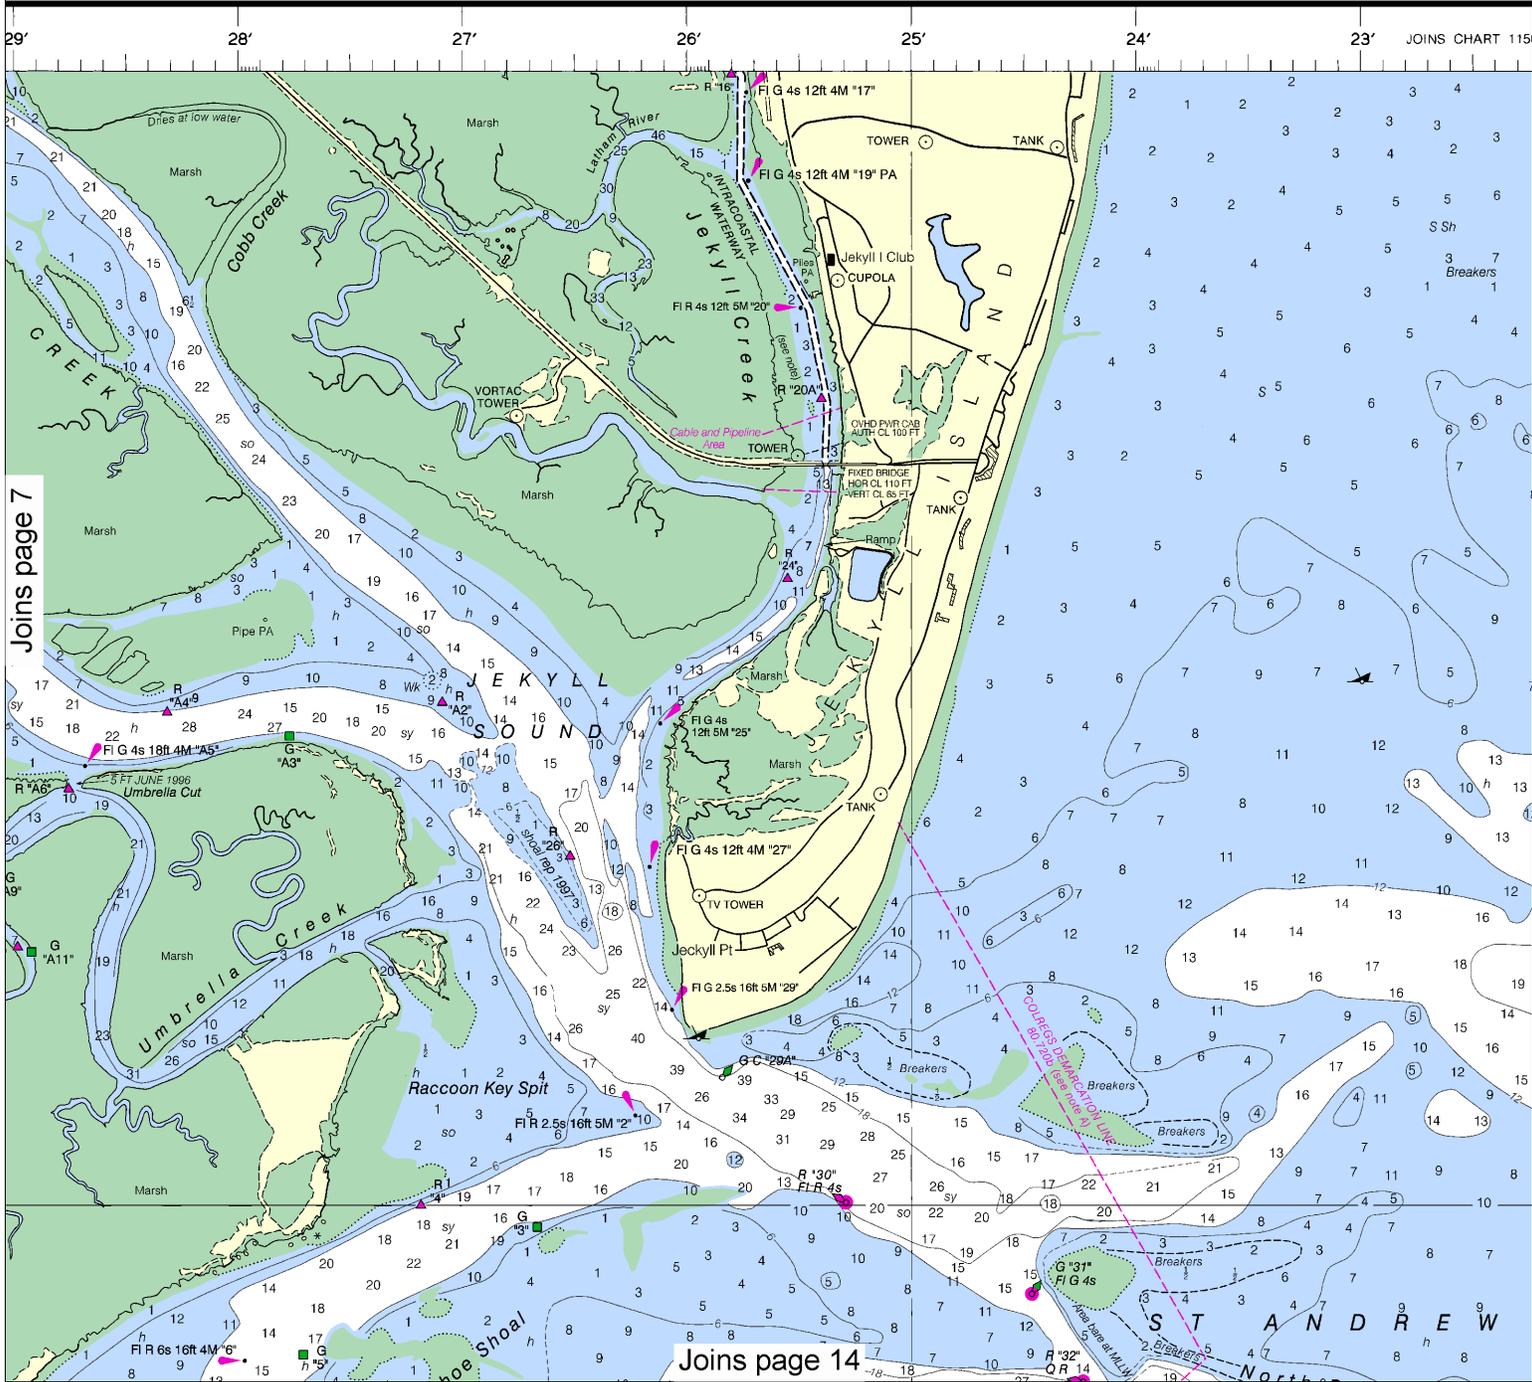

Joins page 7

Joins page 14



Note: Chart grid lines are aligned with true north.

Printed at reduced scale.

SCALE 1:40,000
Nautical Miles

See Note on page 5.



RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

**NOTE B
RECOMMENDED WHALE AVOIDANCE PRECAUTIONARY AREA**

The precautionary area shown on this chart is RECOMMENDED for use by all vessels traveling within its limits. This precautionary area has been established to reduce the likelihood of ship strikes of endangered North Atlantic right whales. CAUTION: Full bottom coverage surveys have not been conducted within the precautionary area, so uncharted dangers may exist. See Source Diagram and Chapter 1, U.S. Coast Pilot.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 4. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 7th Coast Guard District in Miami, Florida, or at the Office of the District Engineer, Corps of Engineers in Savannah, Georgia.
Refer to charted regulation section numbers.

CAUTION

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117.


Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.

Station positions are shown thus:


○ (Accurate location) ○ (Approximate location)

NOTE S


Regulations for Ocean Dumping Sites are contained in 40 CFR, Parts 220-229. Additional information concerning the regulations and requirements for use of the sites may be obtained from the Environmental Protection Agency (EPA). See U.S. Coast Pilots appendix for addresses of EPA offices. Dumping subsequent to the survey dates may have reduced the depths shown.

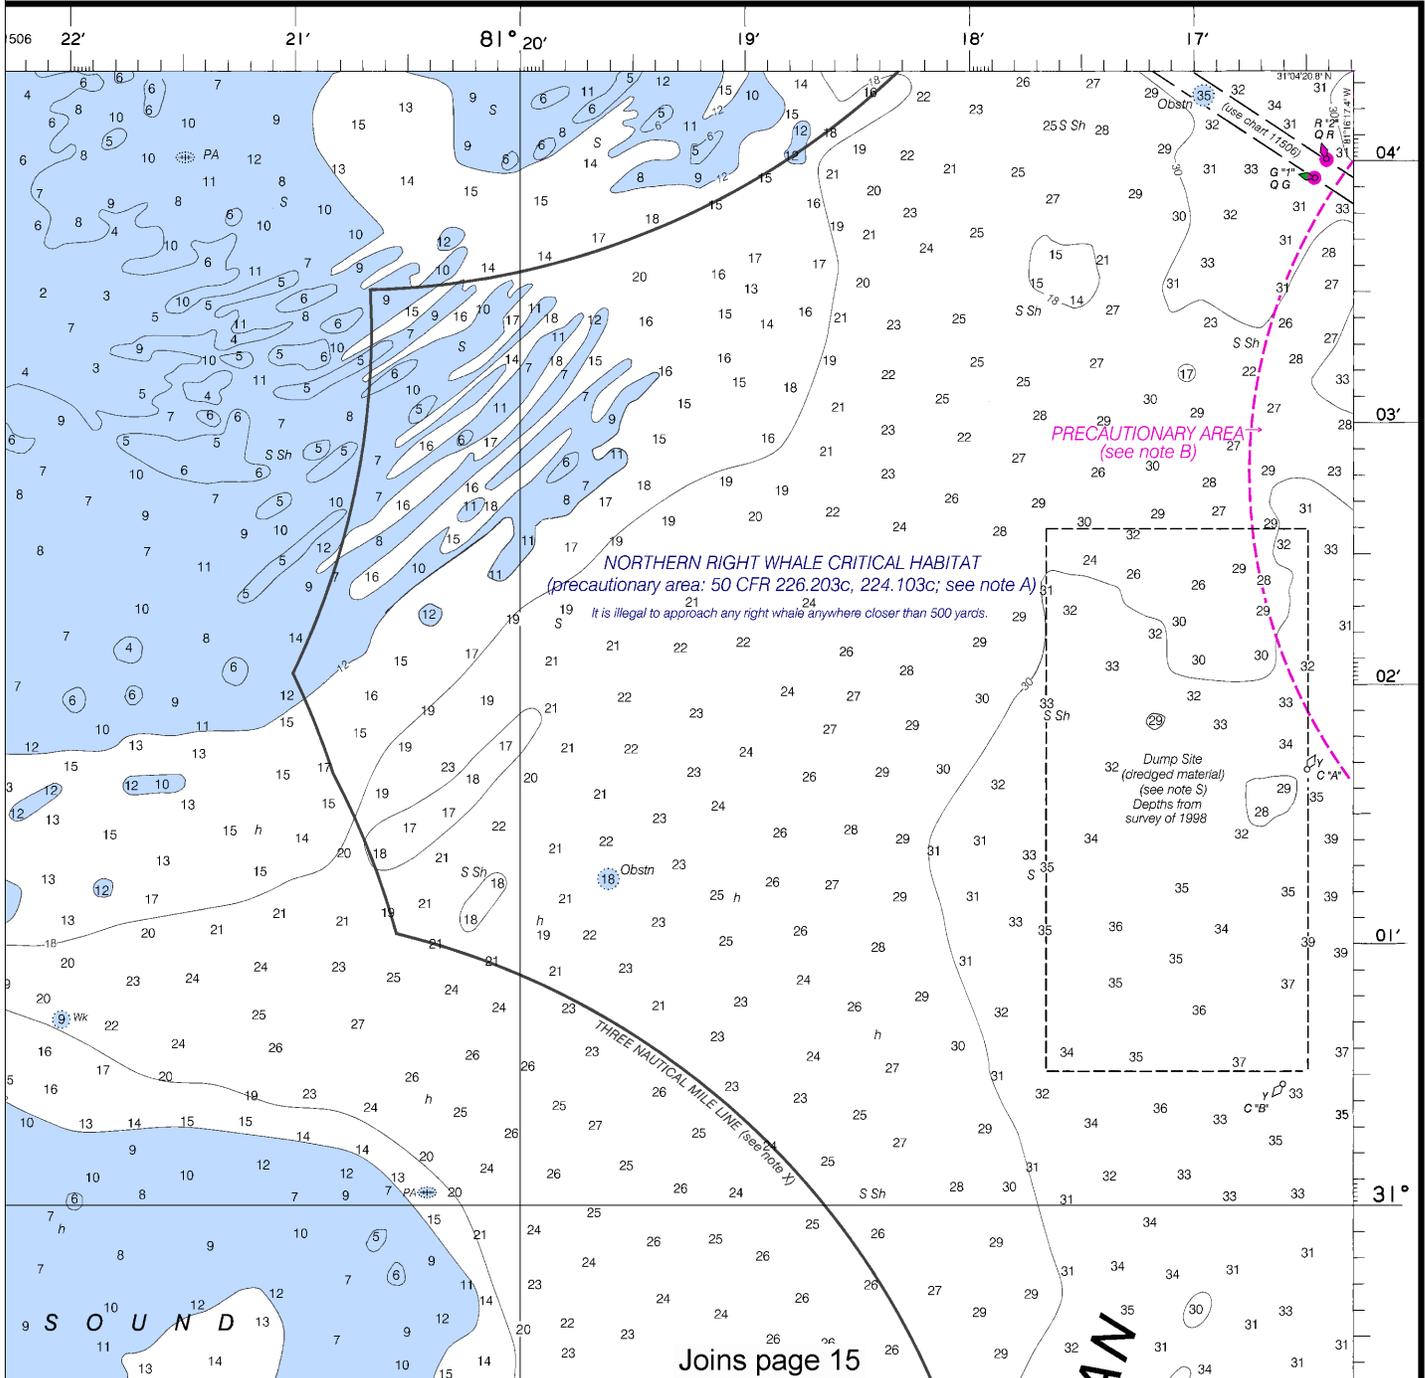


Joins page 5

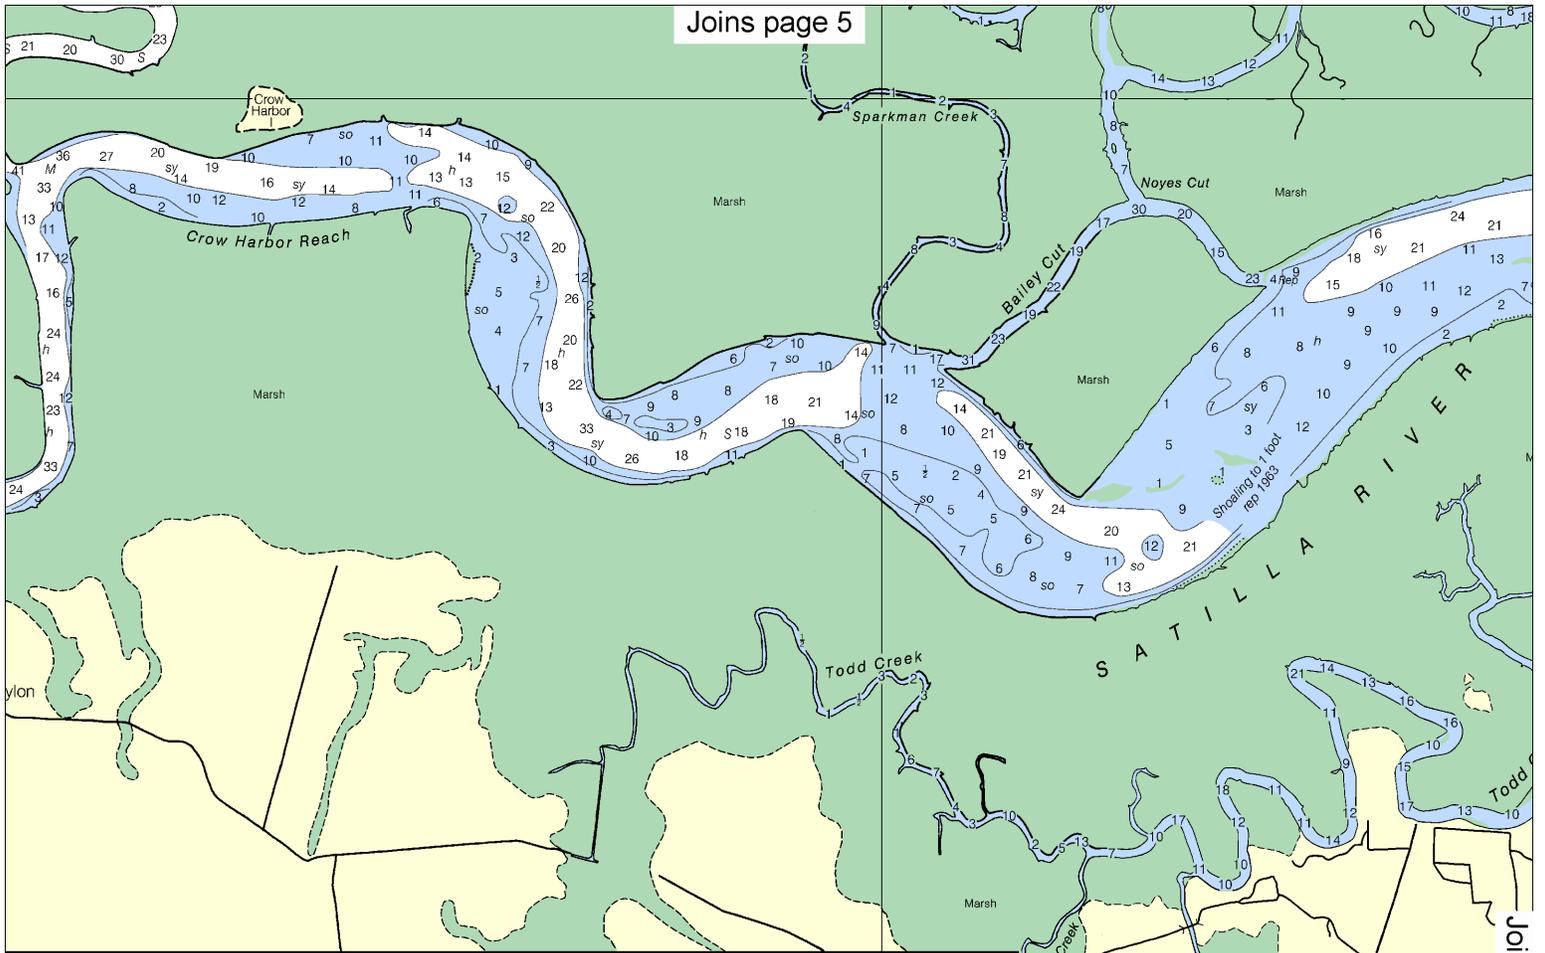


Joins page 12

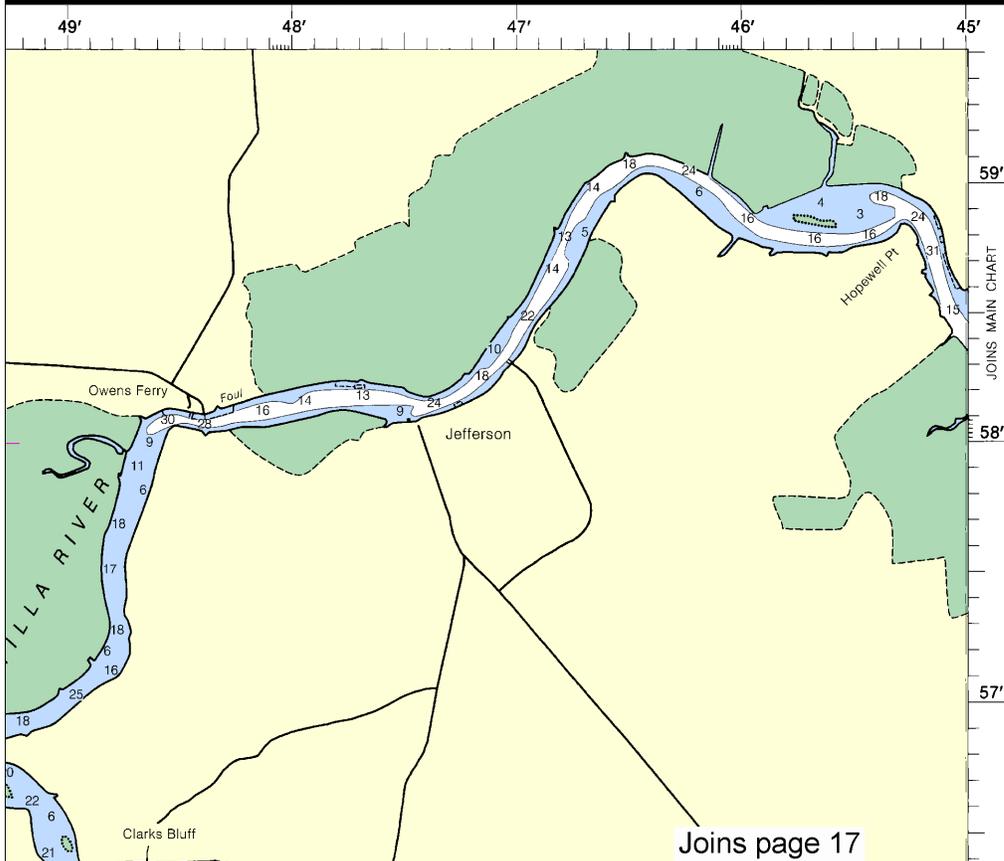

Joins page 17

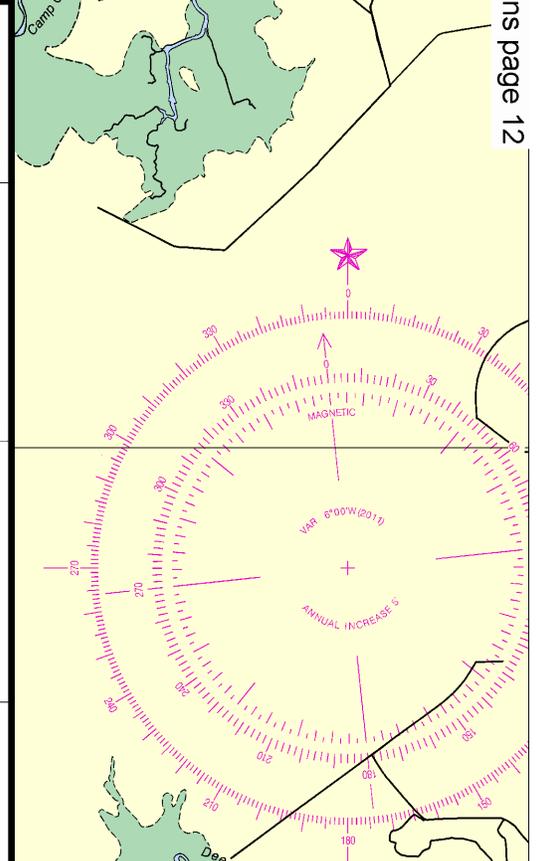


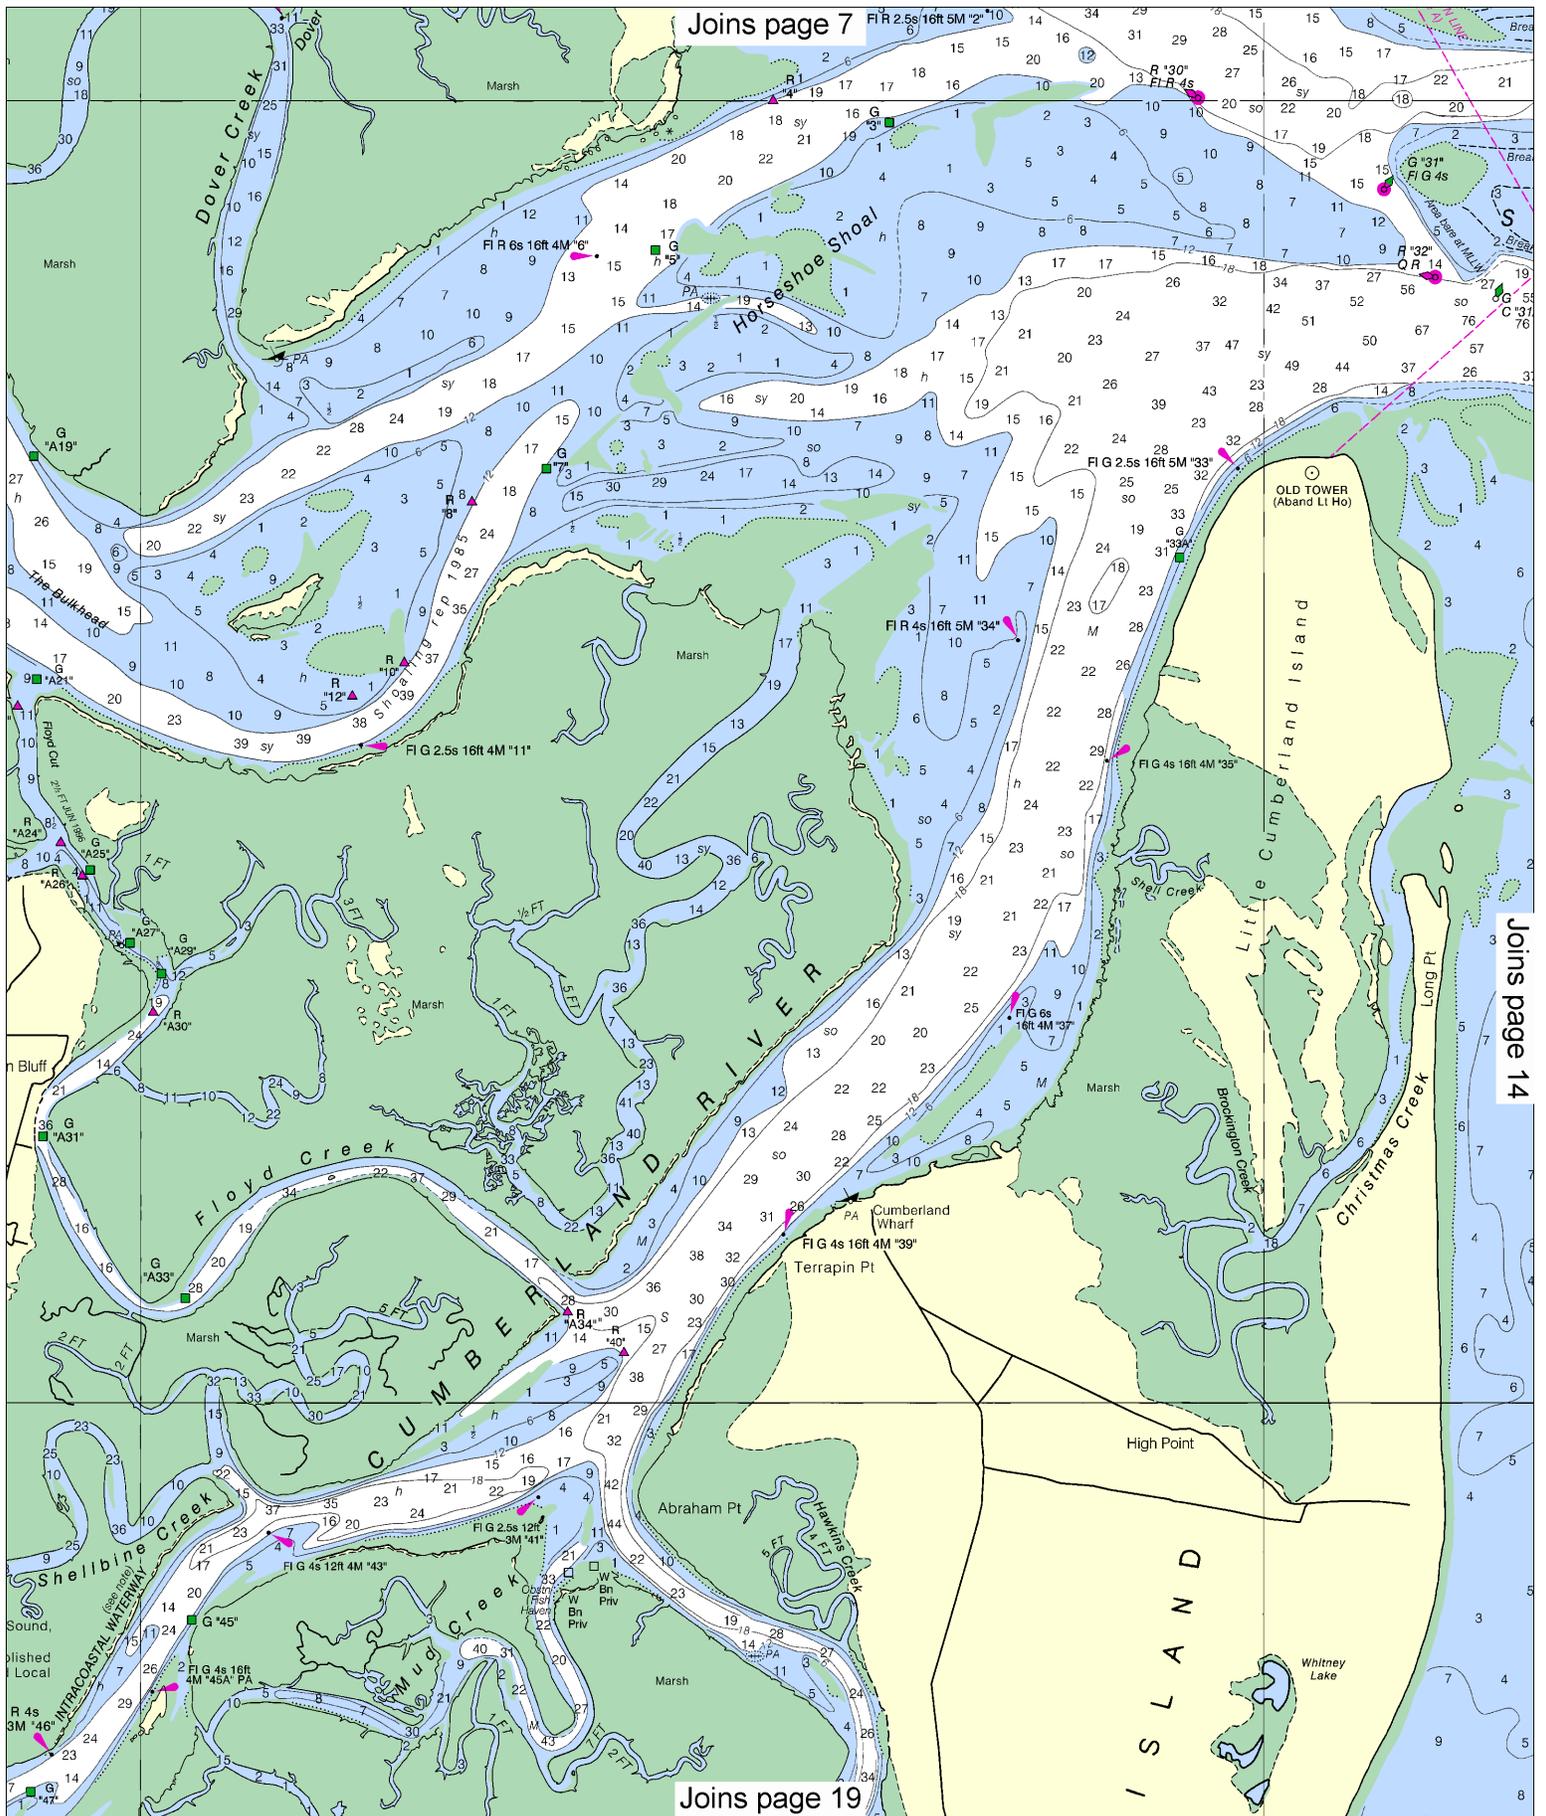

Joins page 7

Joins page 14

Joins page 19

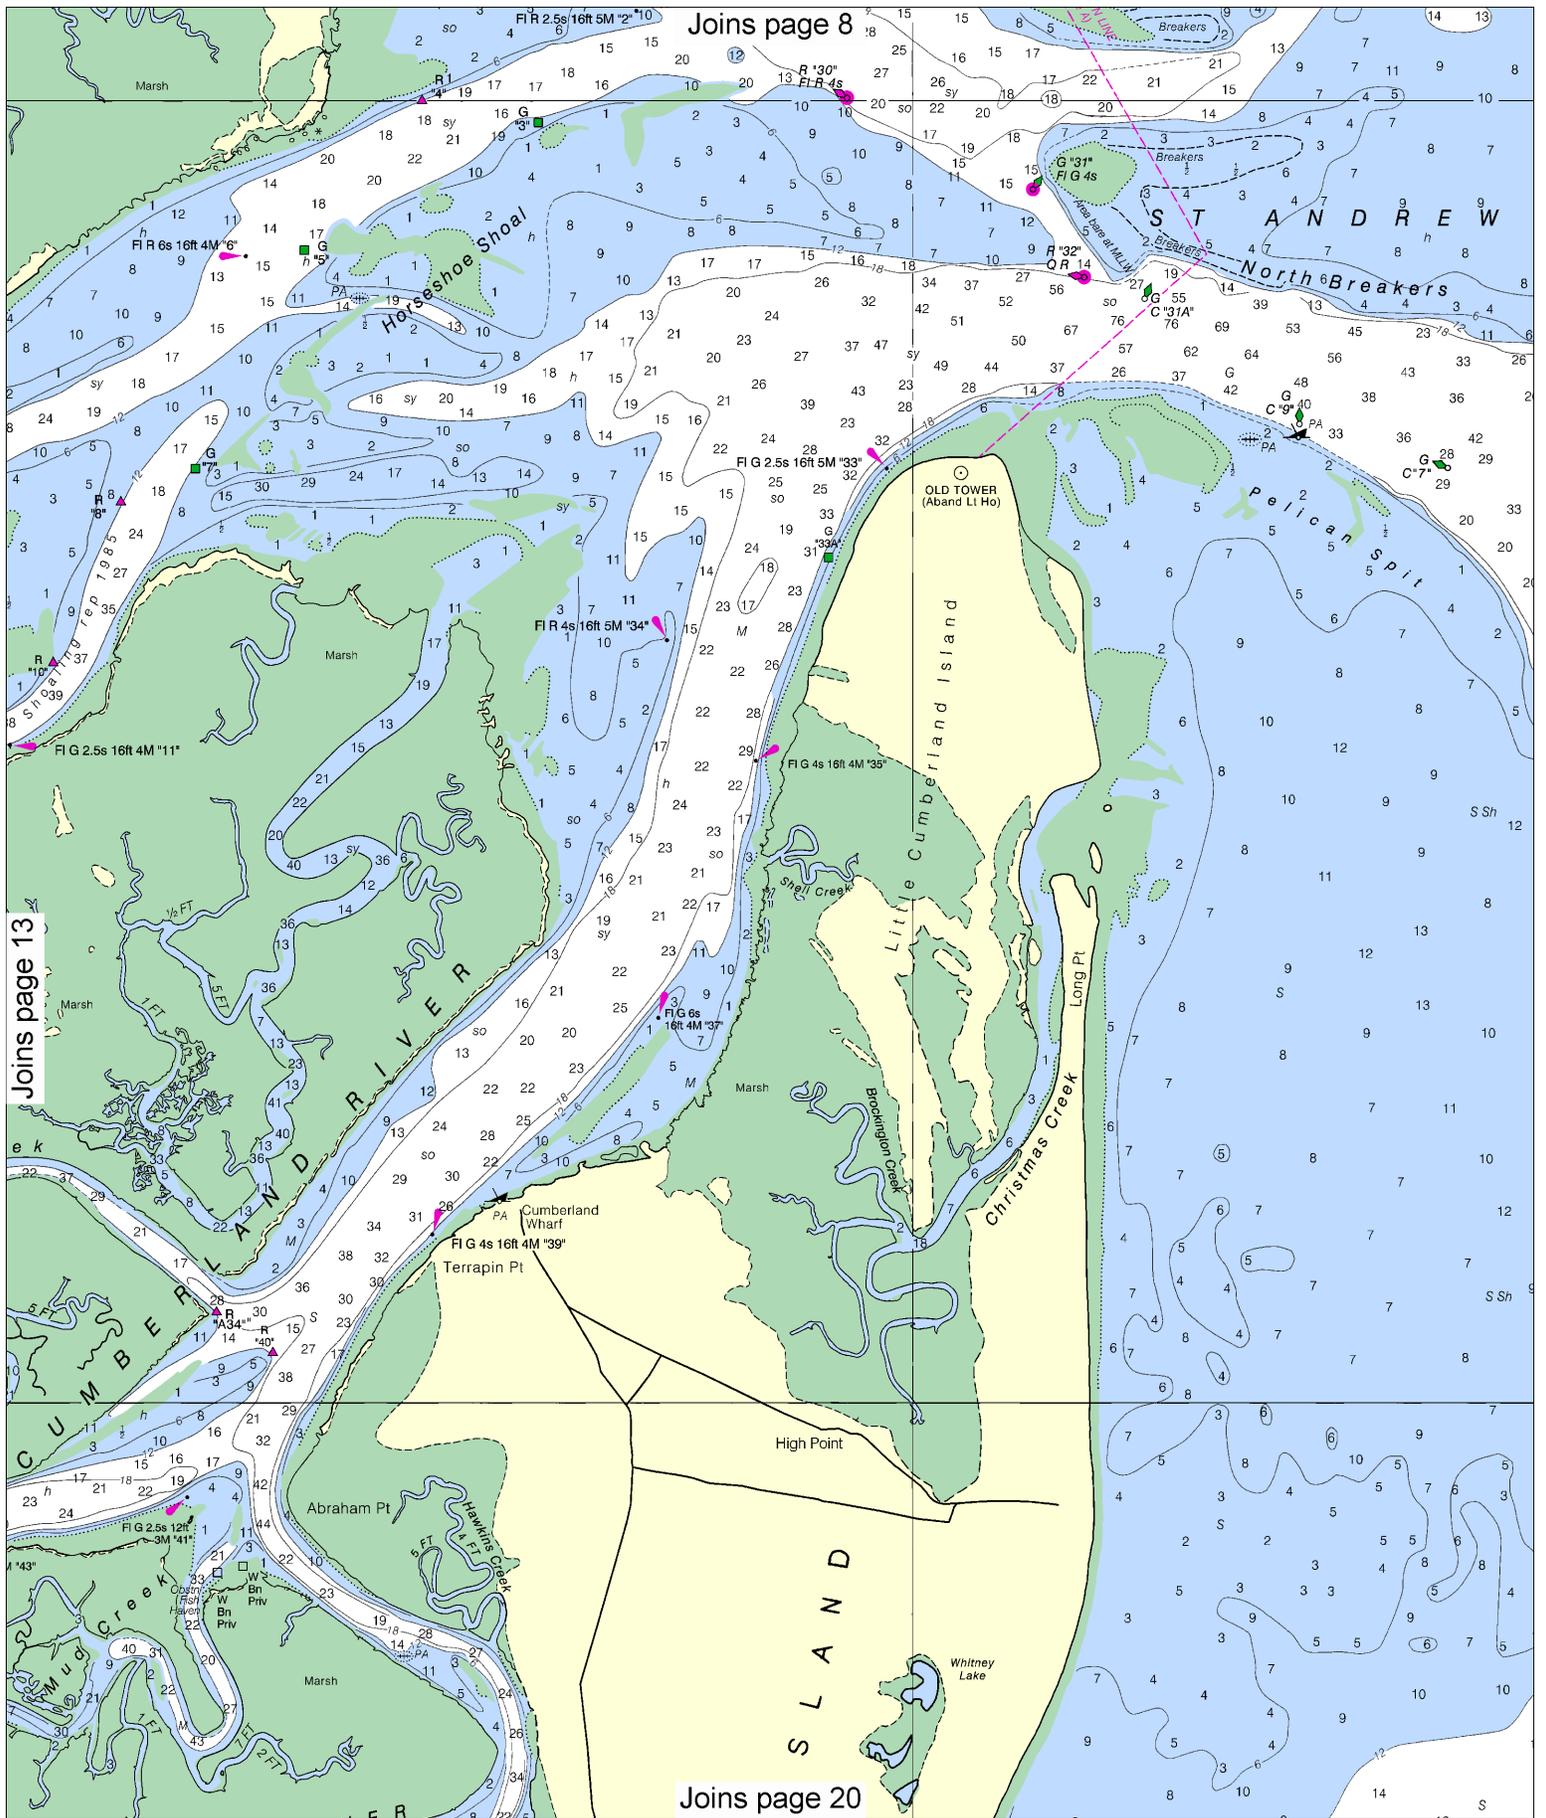

Joins page 13

Joins page 8

Joins page 20

14


Note: Chart grid lines are aligned with true north.


Printed at reduced scale.

SCALE 1:40,000
Nautical Miles

See Note on page 5.



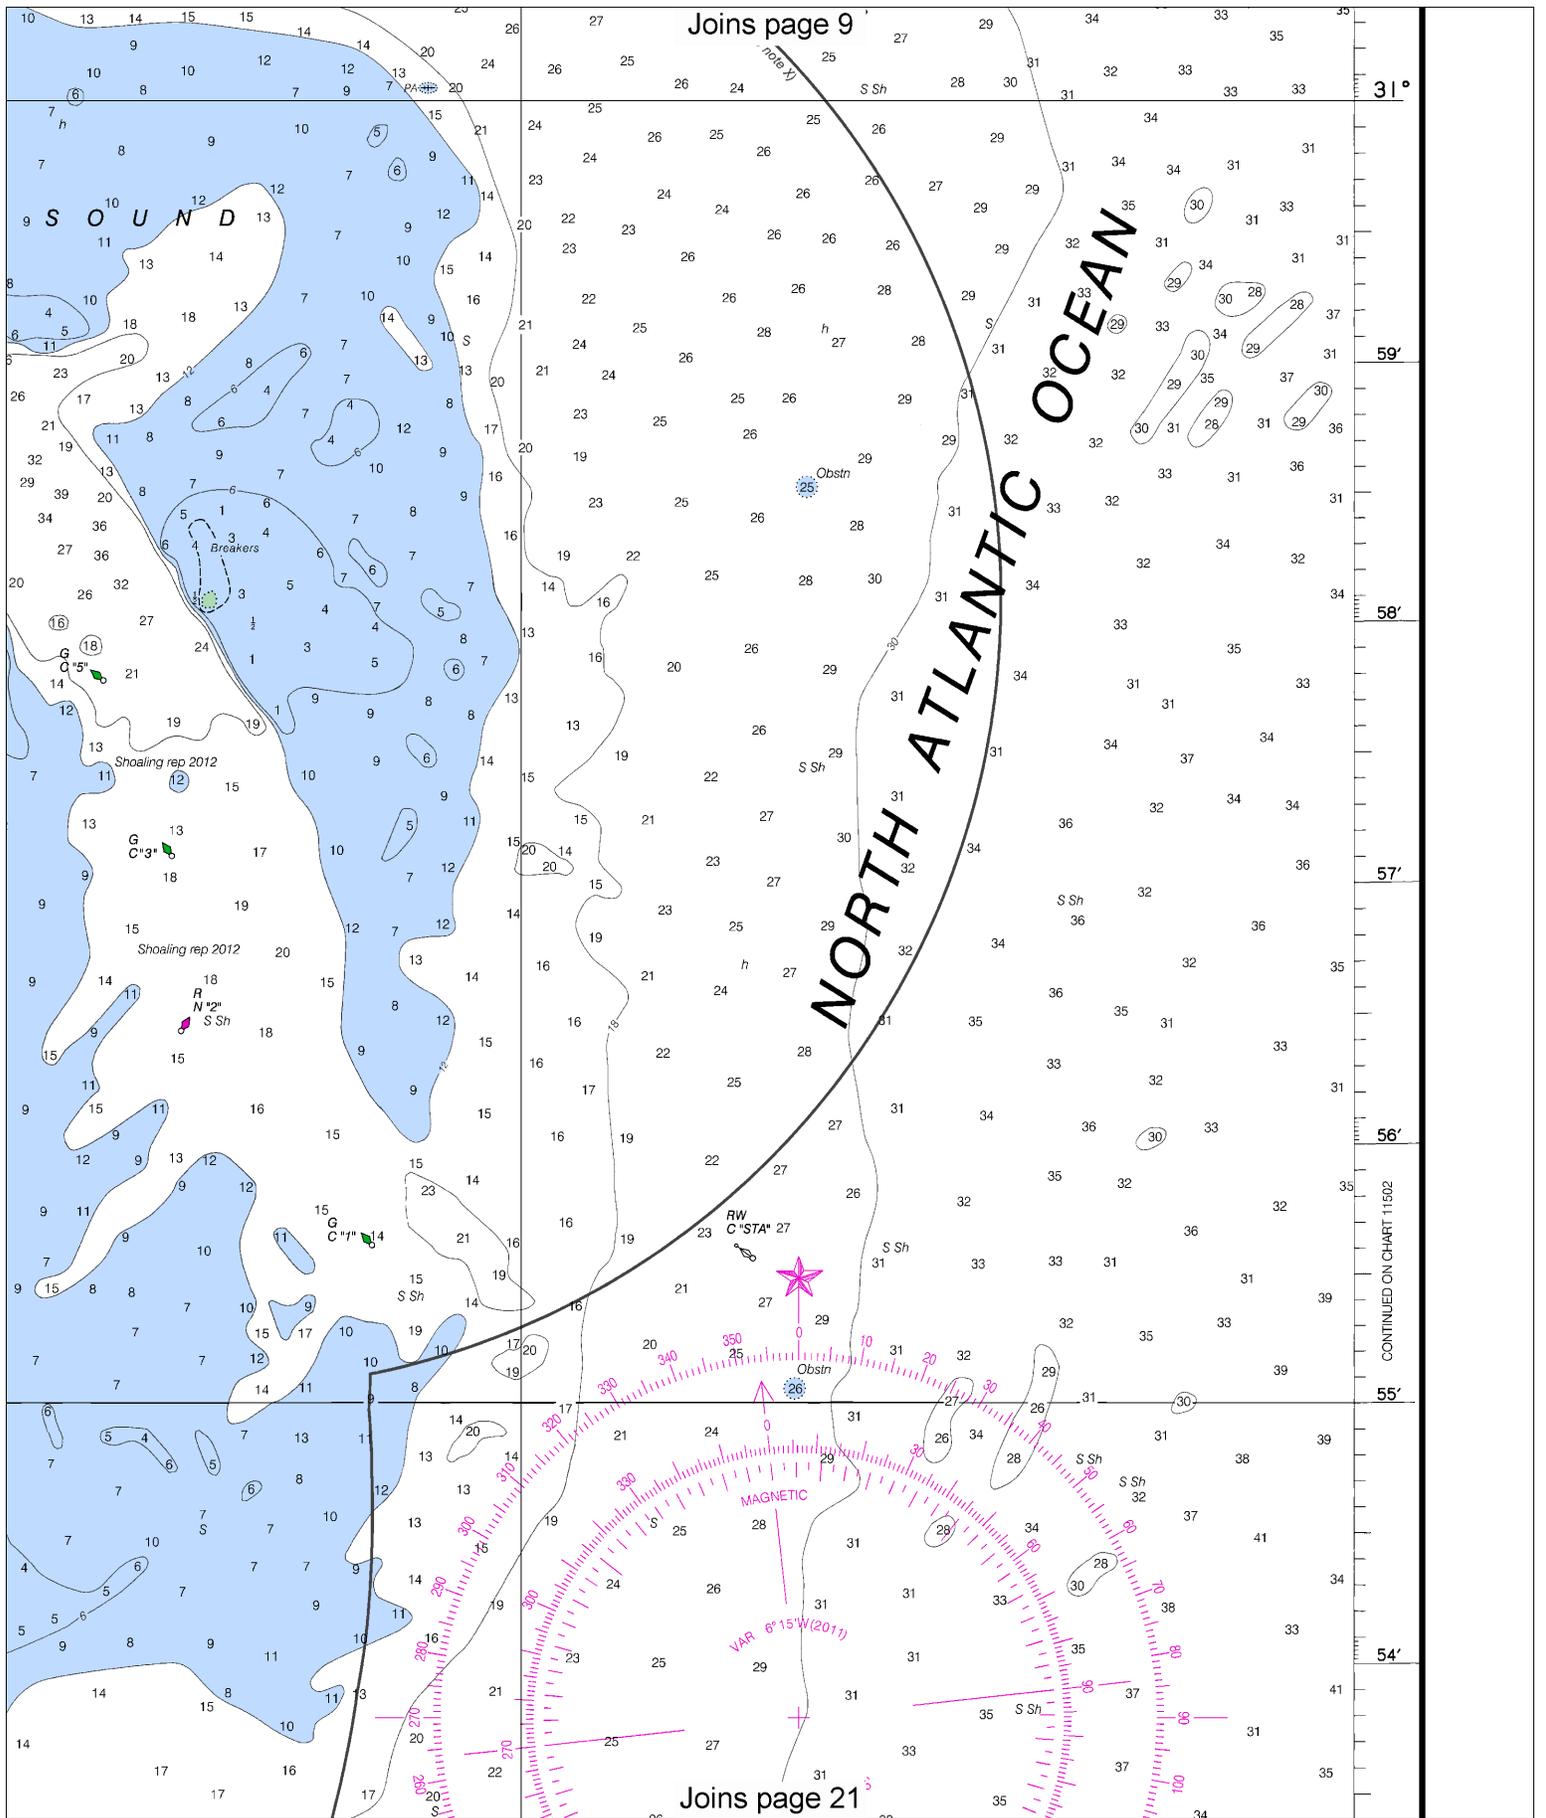

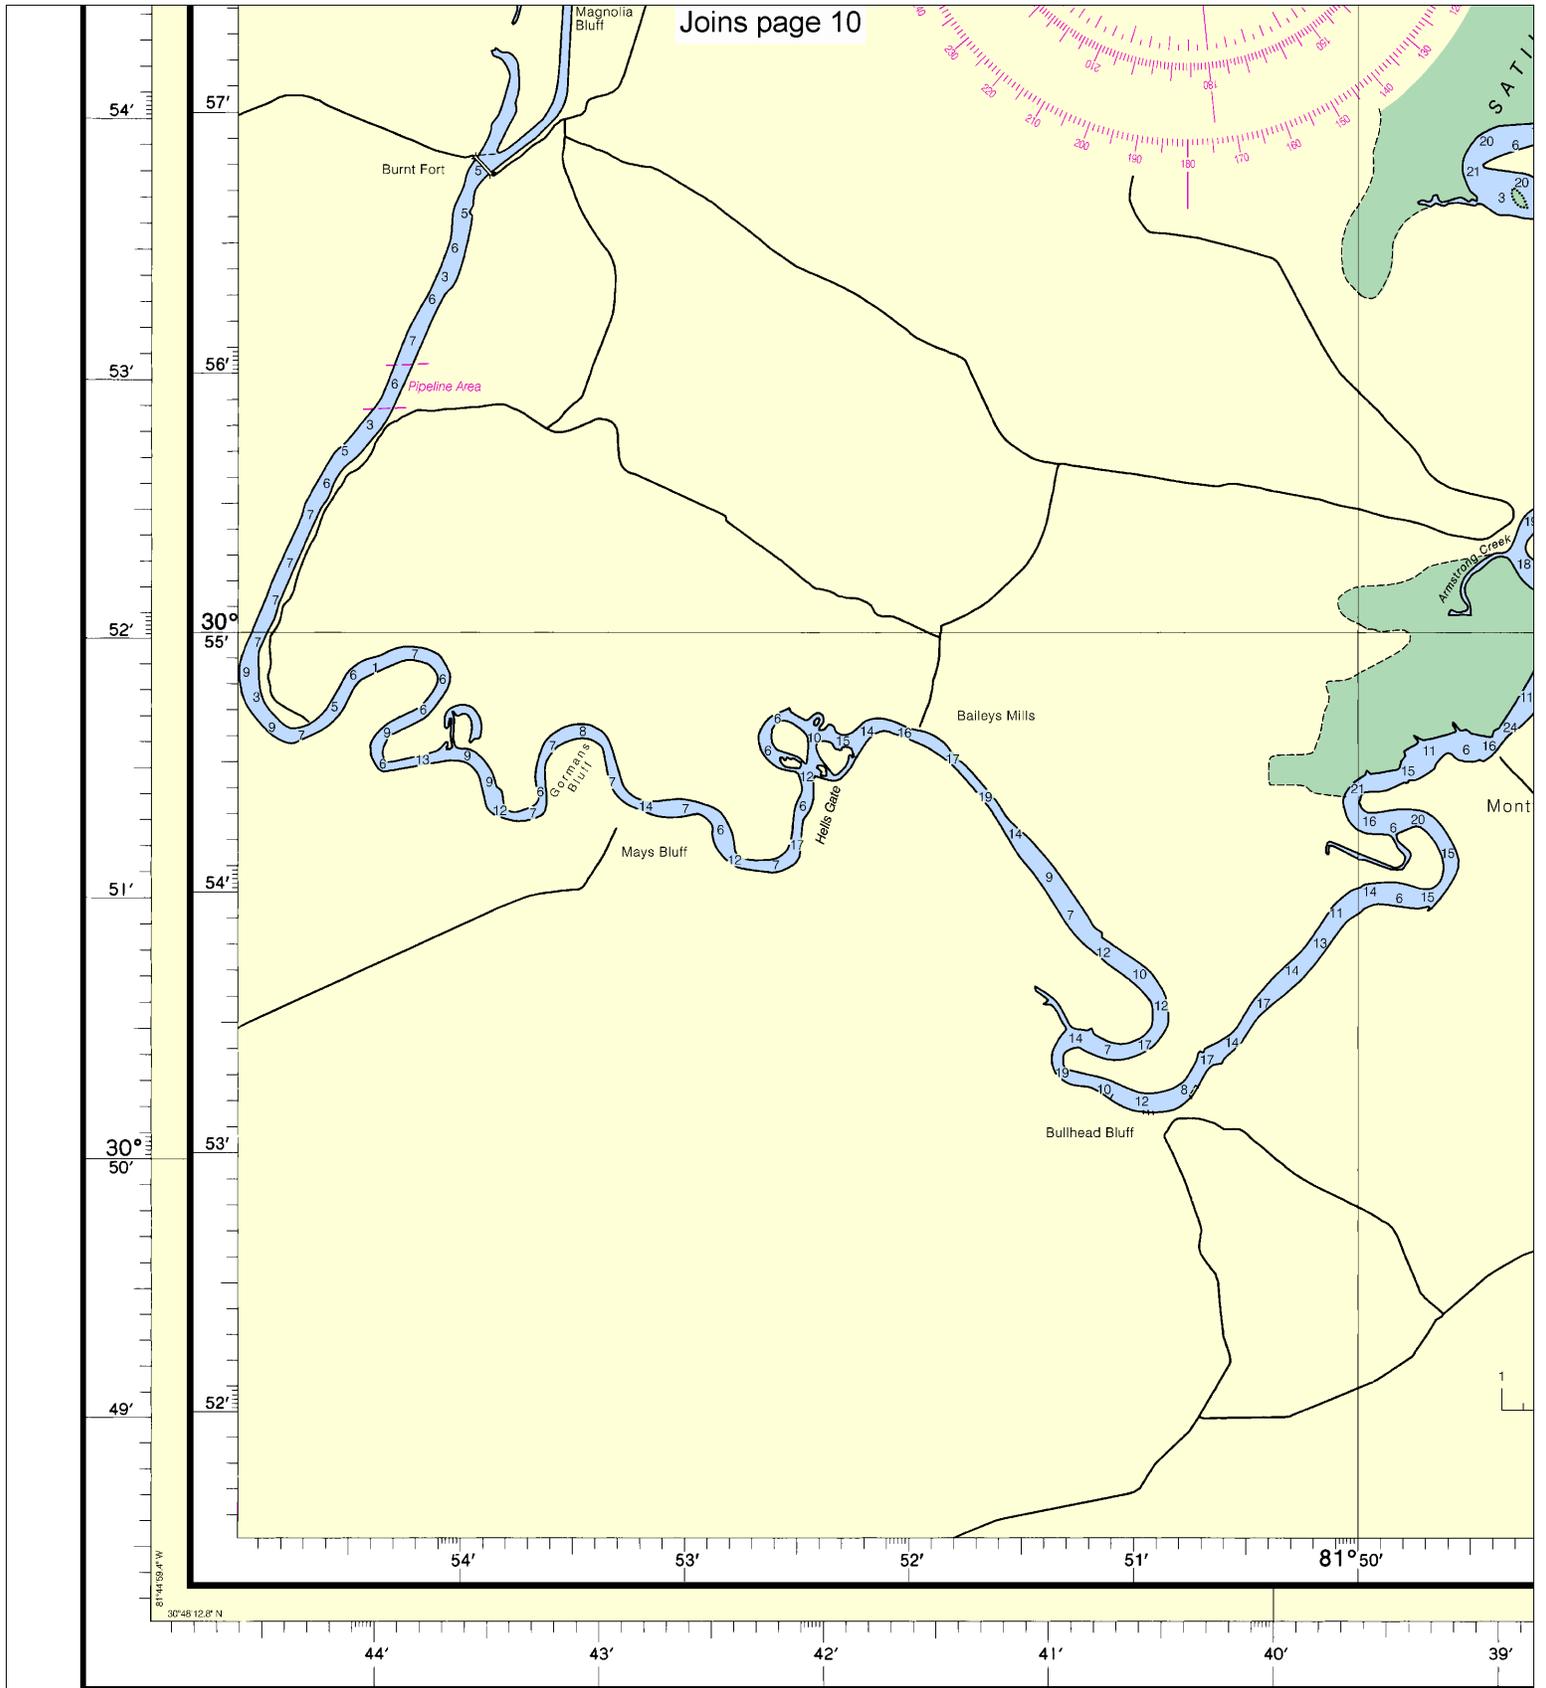

18th Ed., Jun. /11 ■ Corrected through NM Jun. 25/11
 Corrected through LNM Jun. 21/11

11504

CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

This nautical chart has been designed to promote safe navigation. The U.S. Coast Guard and the U.S. Navy encourage users to submit corrections, additional information, or comments to the Chief, Marine Chart Division (N/CSD), U.S. Coast Guard, 1674 Rte. 1, Silver Spring, Maryland 20910-3282.


16



Note: Chart grid lines are aligned with true north.

Printed at reduced scale.

SCALE 1:40,000
 Nautical Miles

See Note on page 5.



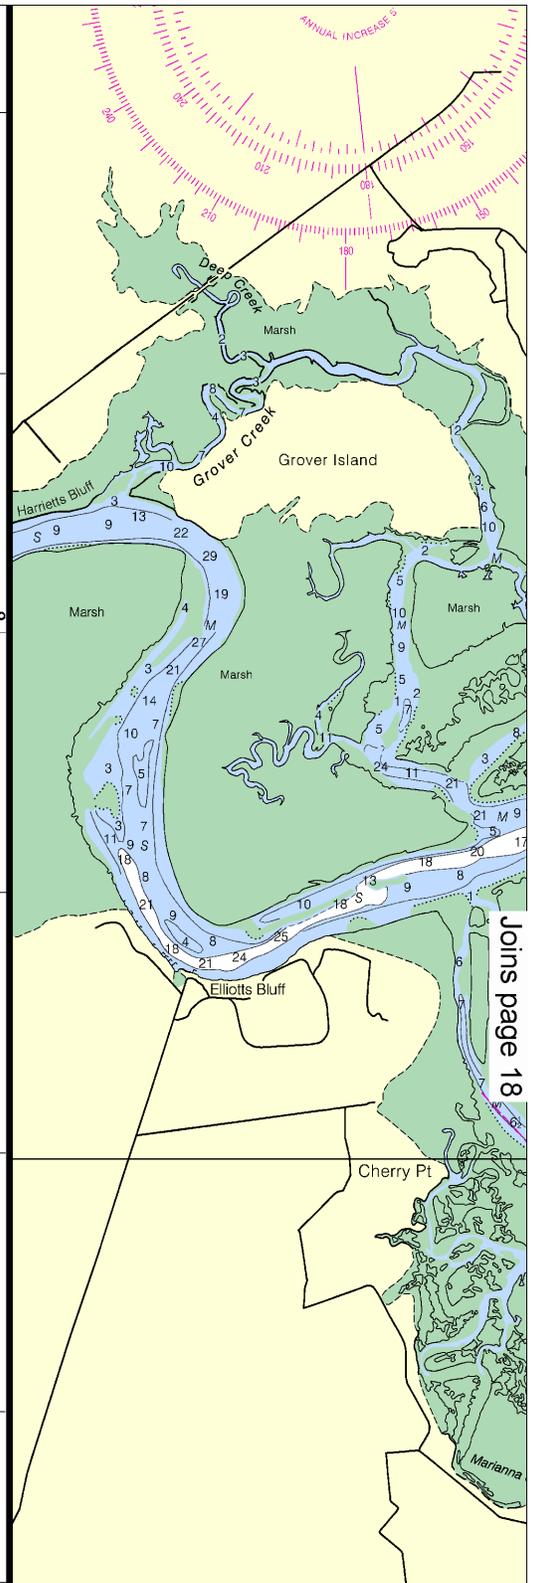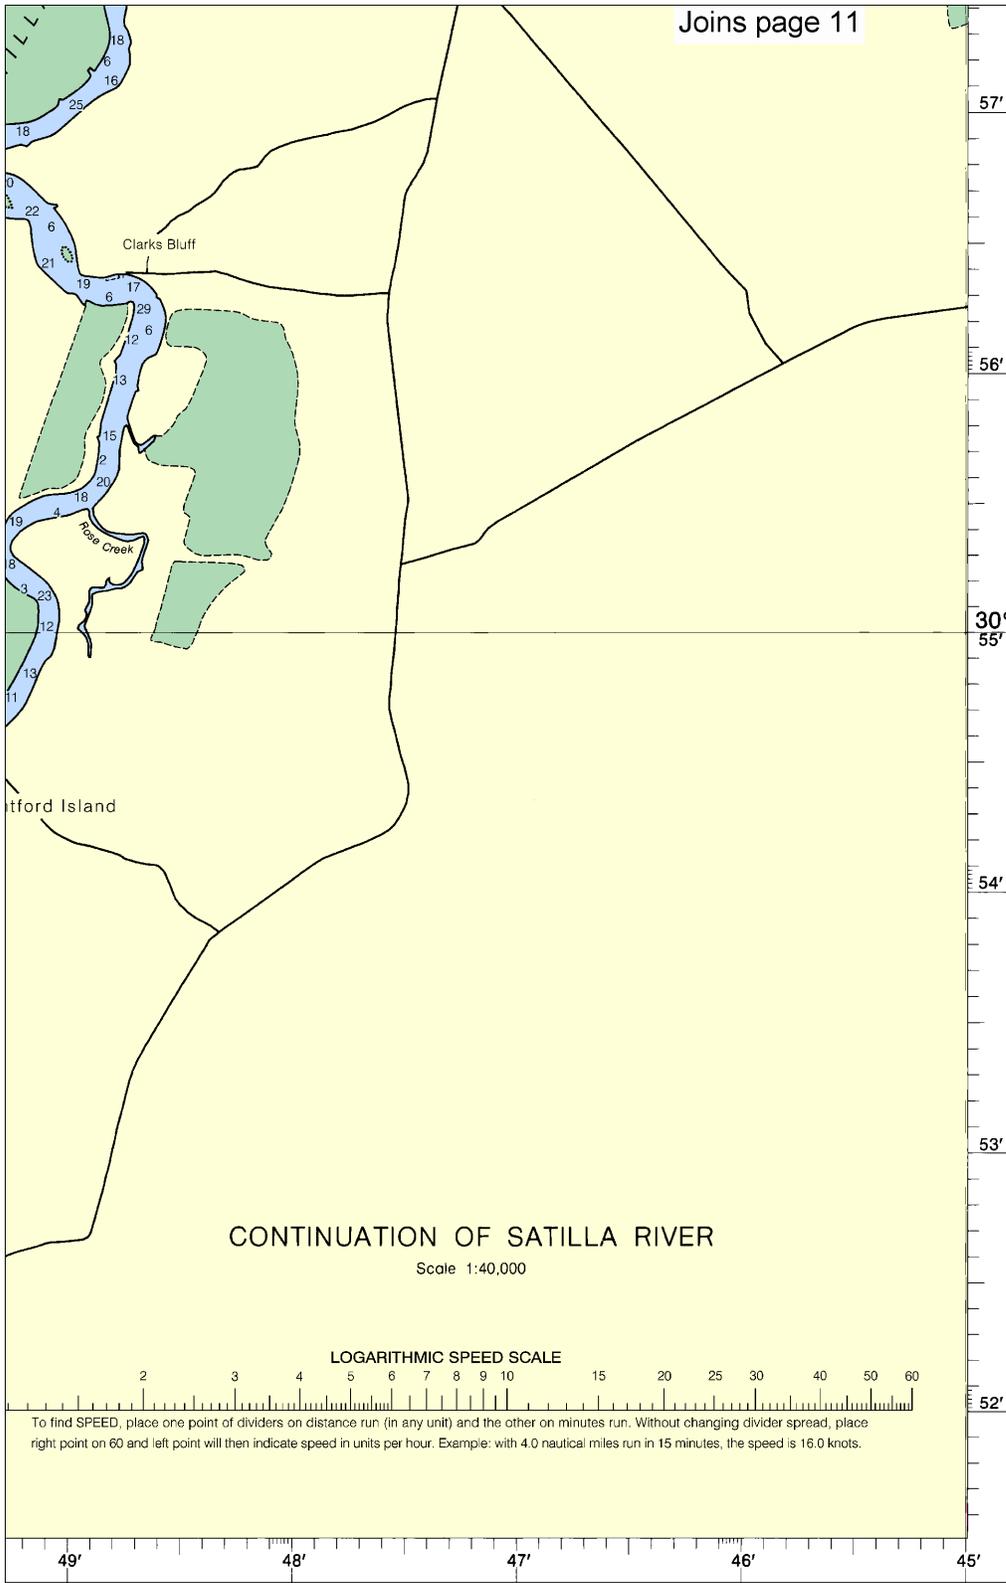


Navigation. The National Ocean Service, or comments for this chart, contact the National Ocean Service, National Ocean Service, 1675 Rhode Island Avenue, Silver Spring, MD 20910-2795, or call 1-800-368-5858.

PRINT-ON-DEMAND CHARTS
NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered using Print-on-Demand technology. New Editions are available 2-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at <http://ocsddata.nod.noaa.gov/drs/inquiry.aspx>, or OceanGrafix at 1-877-56CHART or <http://www.oceangrafix.com>.

Joins page 12



INTRACOASTAL WATERWAY
The project depth from St Simons Se
GA., to Fort Pierce, FL, is 12 feet.
The controlling depths are publi
periodically in the U.S. Coast Guard
Notice to Mariners.

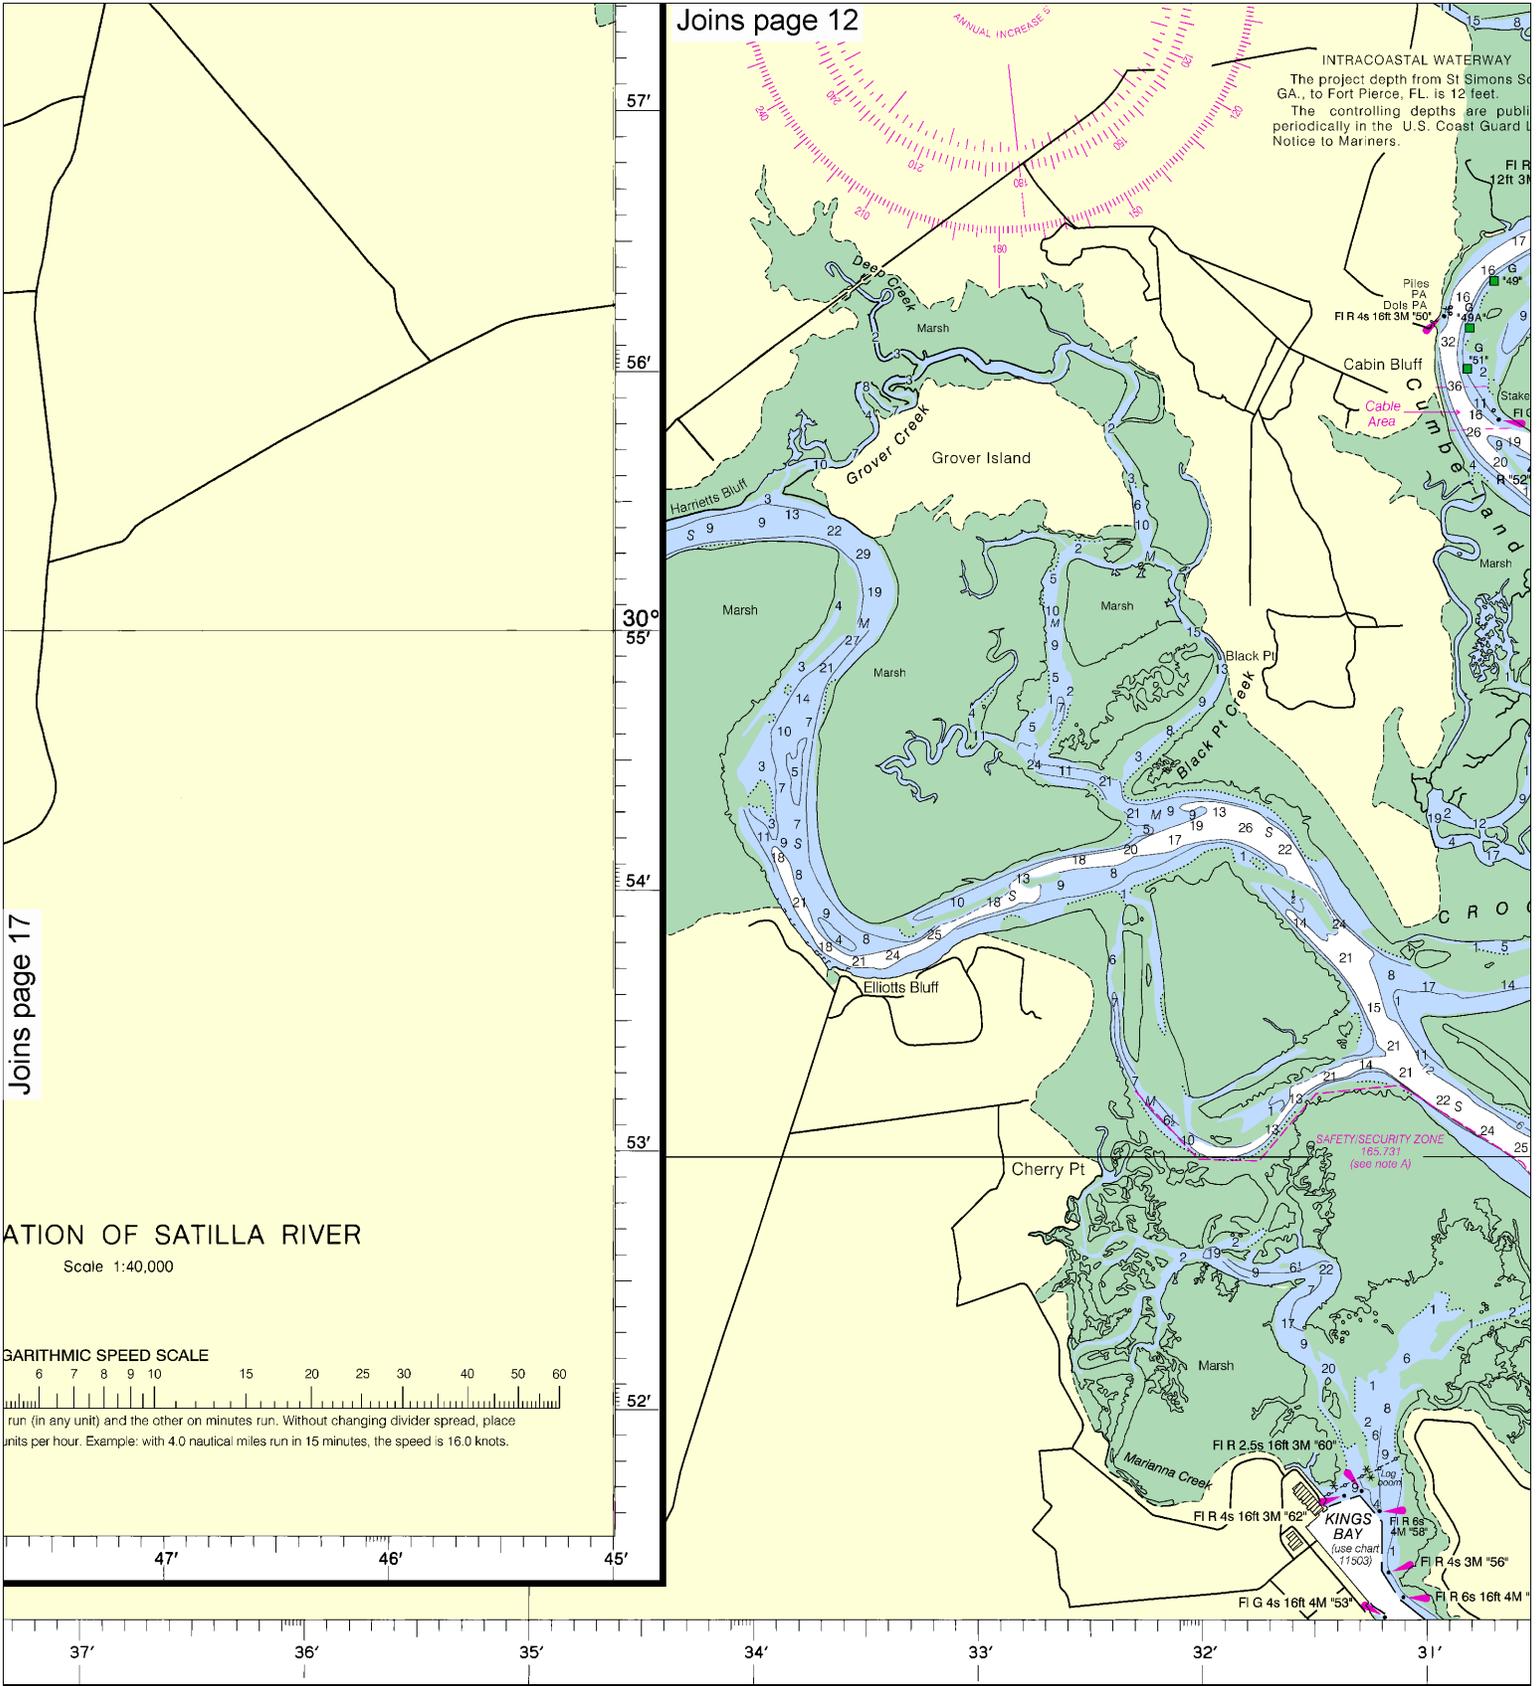

Joins page 17

ATATION OF SATILLA RIVER

Scale 1:40,000

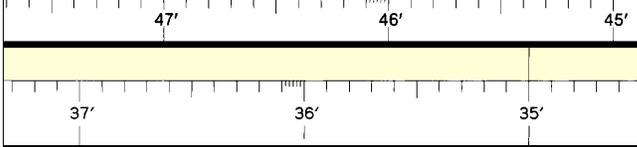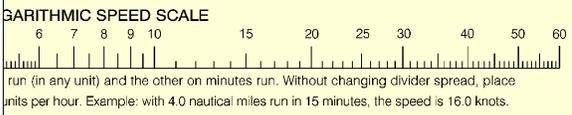

PRINT-ON-DEMAND CHARTS
Partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners
tions. Charts are printed when ordered using Print-on-Demand technology. New
ble 2-8 weeks before their release as traditional NOAA charts. Ask your chart agent
hand charts or contact NOAA at <http://ocsddata.noaa.gov/drs/inquiry.aspx>, or
877-56CHART or <http://www.oceangrafix.com>.

Published at Wash
U.S. DEPARTMENT OF
NATIONAL OCEANIC AND ATMOSPHERIC
NATIONAL OCEANIC AND ATMOSPHERIC
COAST SURVEILLANCE


18


Note: Chart grid
lines are aligned
with true north.

Printed at reduced scale.

SCALE 1:40,000
Nautical Miles


See Note on page 5.



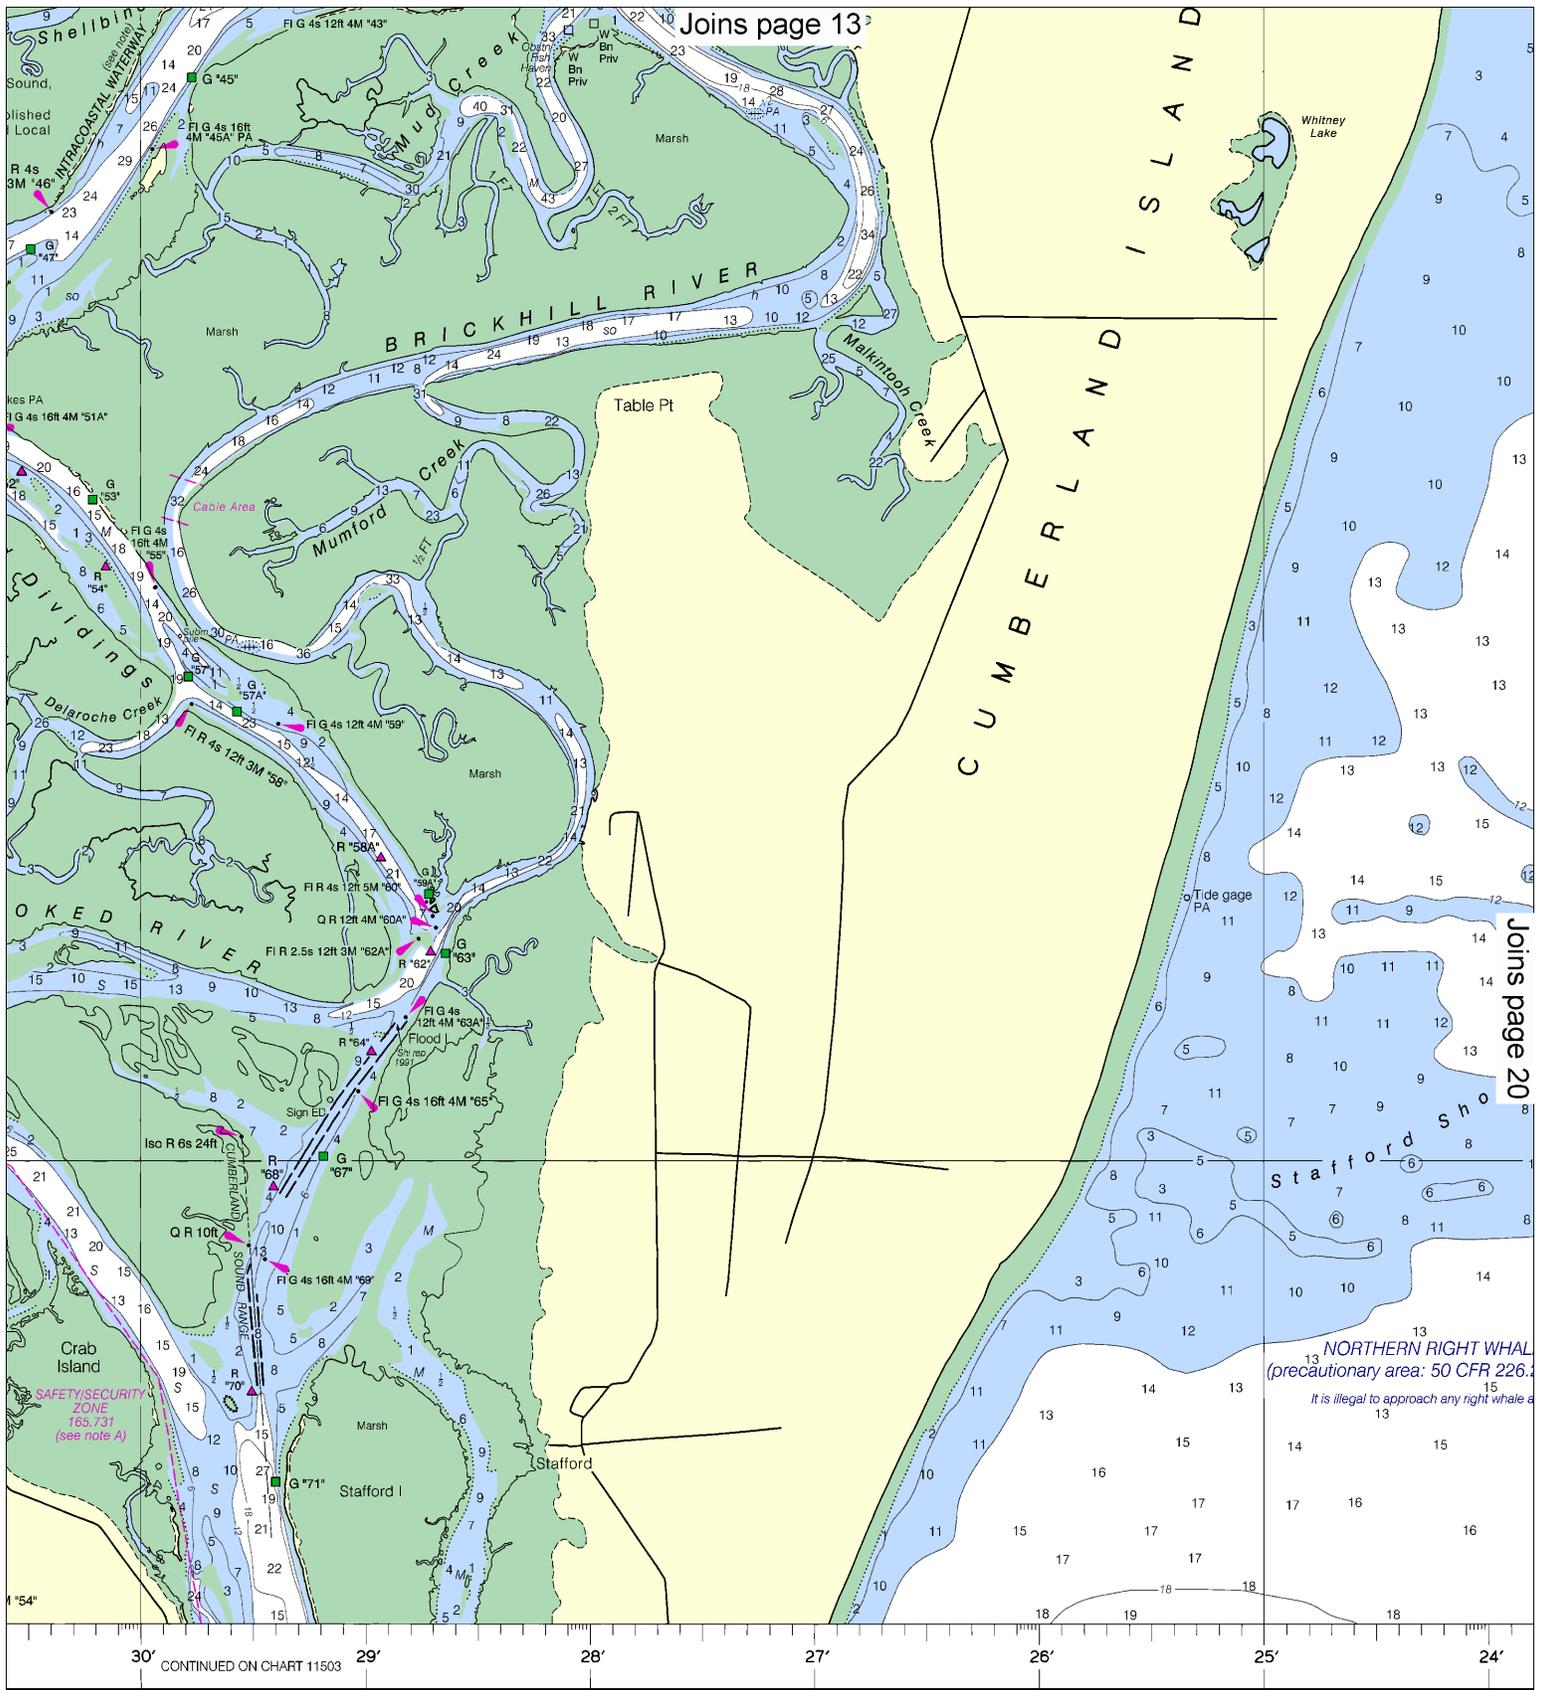

Washington, D.C.
 DEPARTMENT OF COMMERCE
 NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
 COAST AND GEODETIC SURVEY

SOUNDINGS II

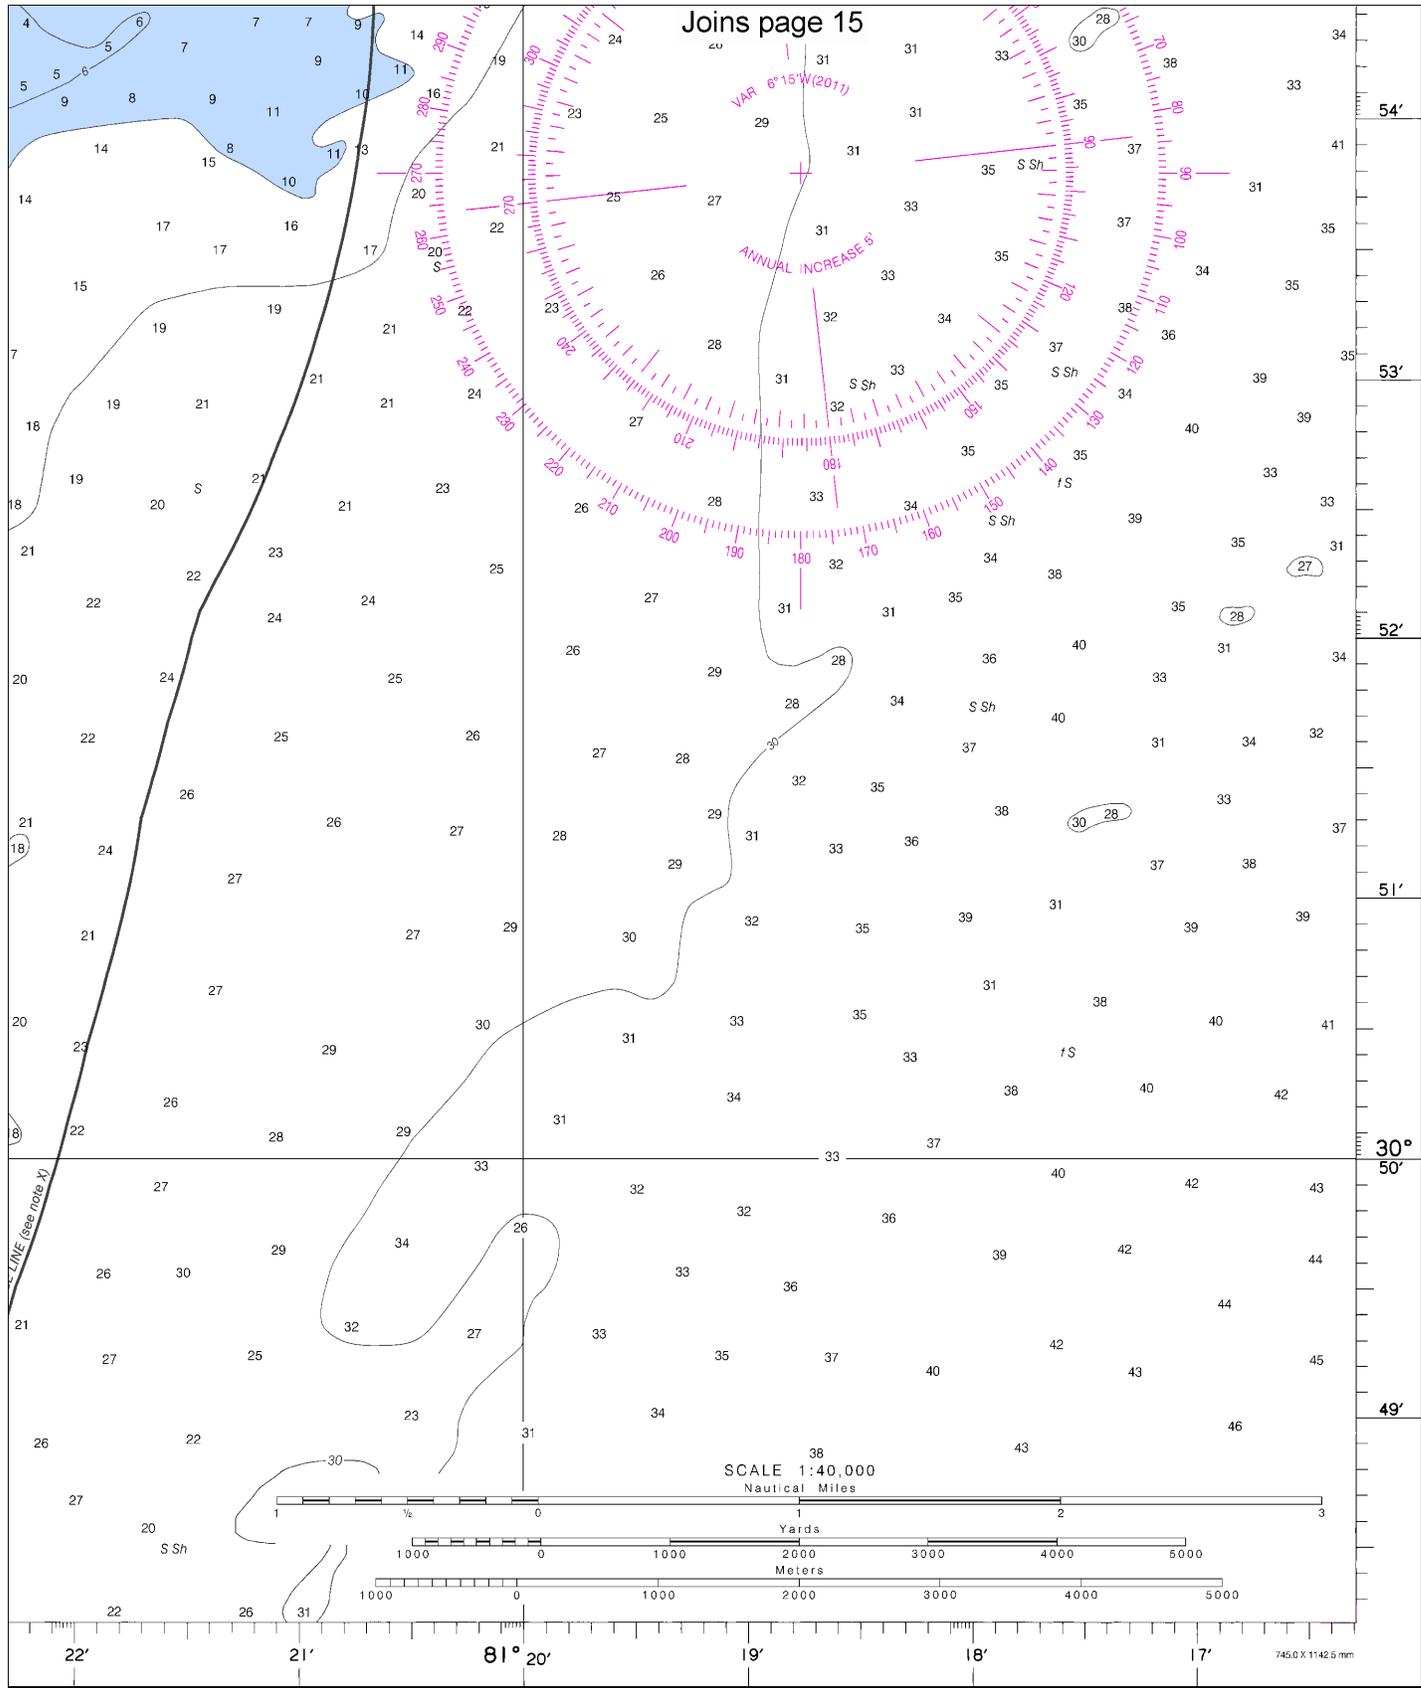

ED. NO. 18

NSN 7642014010261
 NGA REFERENCE NO. 11XHA11504

St Andrew Sound and Satilla River
 SOUNDINGS IN FEET - SCALE 1:40,000

11504

2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
12	16	24	30	36	42	48	54	60	66	72	78	84	90	96	102
3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
19	20	21	22	23	24	25	26	27	28	29	30	31			





EMERGENCY INFORMATION

VHF Marine Radio channels for use on the waterways:

Channel 6 – Inter-ship safety communications.

Channel 9 – Communications between boats and ship-to-coast.

Channel 13 – Navigation purposes at bridges, locks, and harbors.

Channel 16 – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other vessels. Contact the other vessel, agree to another channel, and then switch.

Channel 22A – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here.

Channels 68, 69, 71, 72 and 78A – Recreational boat channels.

Getting and Giving Help — Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.

Distress Call Procedures

- Make sure radio is on.
- Select Channel 16.
- Press/Hold the transmit button.
- Clearly say: "MAYDAY, MAYDAY, MAYDAY."
- Also give: Vessel Name and/or Description; Position and/or Location; Nature of Emergency; Number of People on Board.
- Release transmit button.
- Wait for 10 seconds — If no response Repeat MAYDAY call.

HAVE ALL PERSONS PUT ON LIFE JACKETS!



NOAA Weather Radio All Hazards (NWR) is a nationwide network of radio stations broadcasting continuous weather information directly from the nearest National Weather Service office. NWR broadcasts official Weather Service warnings, watches, forecasts and other hazard information 24 hours a day, 7 days a week.

<http://www.nws.noaa.gov/nwr/>

Quick References

- Nautical chart related products and information — <http://www.nauticalcharts.noaa.gov>
- Online chart viewer — <http://www.nauticalcharts.noaa.gov/mcd/NOAChartViewer.html>
- Report a chart discrepancy — <http://ocsddata.ncd.noaa.gov/idrs/discrepancy.aspx>
- Chart and chart related inquiries and comments — <http://ocsddata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs>
- Chart updates (LNM and NM corrections) — http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html
- Coast Pilot online — <http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm>
- Tides and Currents — <http://tidesandcurrents.noaa.gov>
- Marine Forecasts — <http://www.nws.noaa.gov/om/marine/home.htm>
- National Data Buoy Center — <http://www.ndbc.noaa.gov/>
- NowCoast web portal for coastal conditions — <http://www.nowcoast.noaa.gov/>
- National Weather Service — <http://www.weather.gov/>
- National Hurricane Center — <http://www.nhc.noaa.gov/>
- Pacific Tsunami Warning Center — <http://ptwc.weather.gov/>
- Contact Us — <http://www.nauticalcharts.noaa.gov/staff/contact.htm>



— For the latest news from Coast Survey, follow @nauticalcharts



This Booklet chart has been designed for duplex printing (printed on front and back of one sheet). If a duplex option is not available on your printer, you may print each sheet and arrange them back-to-back to allow for the proper layout when viewing.

