

BookletChart™



Chesapeake Bay – Severn and Magothy Rivers


NOAA Chart 12282

A reduced-scale NOAA nautical chart for small boaters

When possible, use the full-size NOAA chart for navigation.



- Complete, reduced-scale nautical chart
- Print at home for free
- Convenient size
- Up-to-date with Notices to Mariners
- Compiled by NOAA's Office of Coast Survey, the nation's chartmaker

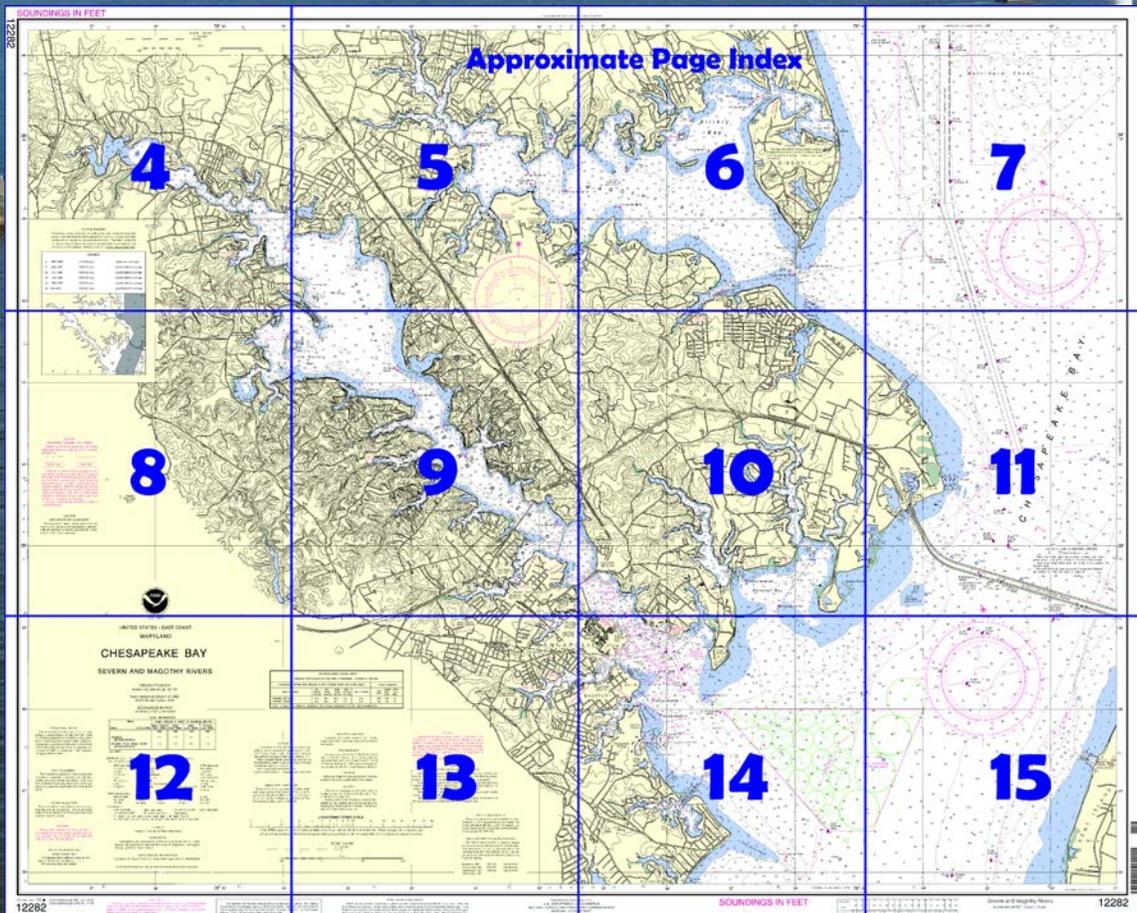

**Published by the
National Oceanic and Atmospheric Administration
National Ocean Service
Office of Coast Survey
www.NauticalCharts.NOAA.gov
888-990-NOAA**

What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

What is a BookletChart™?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.

Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at <http://www.NauticalCharts.NOAA.gov>.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.

For latest Coast Pilot excerpt visit the Office of Coast Survey website at <http://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=12282>.



(Selected Excerpts from Coast Pilot)

Severn River, the approach to Annapolis, empties into Chesapeake Bay 127 miles above the Virginia Capes. Commercial traffic consists of tour boats, fishing and shell fishing craft. Naval craft and many pleasure craft use the river.

The river has main channel depths of 17 feet or more from the entrance to Annapolis, thence 15 feet or more for 8 miles, thence 11 to 7 feet for 2 miles to within 1 mile of

the head. The channel is well marked as far as Annapolis, above which it is marked at the critical points and is easy to follow.

Tides and currents.—The tide is greatly influenced by winds. The current velocity seldom exceeds 0.5 knot. Ice rarely interferes with navigation

except in severe winters, and then only for a short time.

The Severn River Comprehensive Vessel Management Plan regulations established maximum speed limits for day and night operation of boats and minimum wake speed limits for the Severn River and its tributaries. These speed limits vary and are marked by white and orange regulatory markers. For more information contact Maryland Department of Natural Resources, Marine Police, Tawes State Office Building, Annapolis, MD 21401; telephone 410-260-8880.

Weems Creek (39°00.0'N., 76°30.1'W.), on the southwest side of Severn River 3.2 miles above the mouth, has depths of 13 feet for 0.8 mile, thence 11 to 7 feet for 0.3 mile to near the head. A shoal extends 300 yards eastward from the point on the north side of the entrance, and is marked by a buoy. The highway bridge 0.5 mile above the entrance has a swing span with a width of 28 feet and a clearance of 8 feet. The fixed highway bridge about 500 feet above the drawbridge has a clearance of 28 feet. A private special purpose buoy at the mouth of Weems Creek marks a **speed** controlled area.

U.S. Route 50/301 fixed highway bridge over Severn River, 3.5 miles above the mouth, has a clearance of 80 feet at the center span.

Round Bay, an expansion of Severn River beginning 6 miles above the mouth and continuing for 2 miles, has depths of 17 to 23 feet and is traveled extensively by motorboats. **Little Round Bay**, west of Round Bay, has depths of 17 to 19 feet, and is marked by daybeacons. Depths of 4 feet can be carried to a boatyard in **Browns Cove**, behind **St. Helena Island**. Berths, electricity, gasoline, diesel fuel, water, ice, launching ramp, pump-out station, storage and some marine supplies can be obtained. A 35-ton lift is available for hull and engine repairs.

Forked Creek, on the north side of Severn River 9 miles above the mouth, has depths of 16 to 10 feet for most of its 0.4 mile length. Marine services are on the creek with 4 to 6 feet available alongside. Berths, electricity, water, ice and a launching ramp are available. A marine railway can handle crafts to 50 feet; lift to 9 tons for hull and engine repairs.

There is a small-boat basin on the east side of Severn River, 11 miles above the mouth. The controlling depth to the basin is about 3 feet.

Whitehall Bay, on the west side of Chesapeake Bay, is between Greenbury Point (38°58.5'N., 76°27.3'W.) and **Hackett Point**, 1.5 miles to the northeastward. The bay has general depths of 13 to 6 feet. The entrance channel is about 300 yards wide between **Whitehall Flats** on the west and **North Shoal** on the east, both with depths of 3 to 4 feet; a light marks the western limit of North Shoal. A lighthouse at **Sharps Point**, on the west side of the entrance to Whitehall Creek Entrance Light 2W, provides a well-marked approach to the channel between North Shoal and Whitehall Flats.

Mill Creek, which empties into the northwest corner of Whitehall Bay, is entered through a privately dredged entrance channel marked by a light and daybeacons; in 1998, the reported controlling depth was 7 feet. The depths above the dredged channel are 7 to 14 feet for 1.5 miles to near the head of the creek. Gasoline is available at a pier 0.7 mile above the entrance.

Whitehall Creek, which empties into the northeast corner of Whitehall Bay, has depths of 9 to 13 feet for 1.5 miles, then shoals gradually to 1-foot at the head 0.5 mile farther up. The narrow, crooked entrance channel is marked by lights and daybeacons. In 1998, shoaling to 6 feet was reported in the channel between daybeacons 4 and 5. A 35-ton lift is available on the east side of the creek, 1 mile above the mouth.

U.S. Coast Guard Rescue Coordination Center 24 hour Regional Contact for Emergencies

RCC Norfolk	Commander	
	5th CG District	(757) 398-6231
	Norfolk, VA	

Table of Selected Chart Notes

HEIGHTS
 Heights in feet above Mean High Water.

Mercator Projection
 Scale 1:25,000 at Lat. 39° 01'
 North American Datum of 1983
 (World Geodetic System 1984)

SOUNDINGS IN FEET
 AT MEAN LOWER LOW WATER

MAGOTHY RIVER
 The channel north of Gibson Island is marked by lighted buoys maintained by The Gibson Island Yacht Squadron from May 1 to Nov 1 which are not charted.

NOAA WEATHER RADIO BROADCASTS
 The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Baltimore, MD	KEC-83	162.400 MHz
Sudlersville, MD	WXK-97	162.500 MHz
Washington, DC	KHB-36	162.550 MHz

(Manassas, VA)

SMALL CRAFT WARNINGS
 During the boating season small-craft warnings will be displayed from sunrise to sunset on Maryland Marine Police Cruisers while underway in Maryland waters of the Chesapeake Bay and tributaries.

CAUTION
BASCULE BRIDGE CLEARANCES
 For bascule bridges, whose spans do not open to a full upright or vertical position, unlimited vertical clearance is not available for the entire charted horizontal clearance.

CAUTION
 Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.
 During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details, see U.S. Coast Guard Light List.

HORIZONTAL DATUM
 The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.400' northward and 1.140' eastward to agree with this chart.

AIDS TO NAVIGATION
 Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

POLLUTION REPORTS
 Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

RACING BUOYS
 Racing buoys within the limits of this chart are not shown hereon. Information may be obtained from the U.S. Coast Guard District Offices as racing and other private buoys are not all listed in the U.S. Coast Guard Light List.

RADAR REFLECTORS
 Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

WARNING
 The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

CAUTION
 Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

CAUTION
SUBMARINE PIPELINES AND CABLES
 Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

--- Pipeline Area ~~~~~ Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.
 Covered wells may be marked by lighted or unlighted buoys.

CAUTION
 Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117.
 Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.
 Station positions are shown thus:
 ○ (Accurate location) ◌ (Approximate location)

WILLIAM P LANE JR MEMORIAL BRIDGES
 (SOUTH SPAN)
 Three fixed white lights are mounted vertically over fixed green range lights at the center of the main channel span. Fixed green range lights mark the center of the eastern channel span.
 The north and south entrances to the Chesapeake Channel are marked by fixed red lights on dolphins.

CAUTION
FISH TRAP AREAS AND STRUCTURES
 Mariners are warned that numerous uncharted duck blinds and fishing structures, some submerged, may exist in the fish trap areas. Such structures are not charted unless known to be permanent.
 Regulations to assure clear passage to and through dredged and natural channels, and to established landings, are prescribed by the Corps of Engineers in the Code of Federal Regulations.
 Definite limits of fish trap areas have been established in some areas, and those limits are shown thus: ---
 Where definite limits have not been prescribed, the location of fishing structures is restricted only by the regulations.

SOURCE DIAGRAM
 The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

AUTHORITIES
 Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

TIDAL INFORMATION

PLACE	Height referred to datum of soundings (MLLW)	Height referred to datum of soundings (MLLW)		
		Mean Higher High Water	Mean High Water	Mean Low Water
Annapolis	(38°59'N/76°29'W)	1.4 feet	1.2 feet	0.2 feet
Mountain Point	(39°04'N/76°26'W)	1.2 feet	1.0 feet	0.2 feet

Dashes (---) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from <http://tidesandcurrents.noaa.gov>. (May 2012)


BALTIMORE HARBOR CHANNEL DEPTHS
 TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS - REPORT OF JUN 2012

NAME OF CHANNEL	CONTROLLING DEPTHS FROM SEAWARD IN FEET AT MEAN LOWER LOW WATER (MLLW) *				DATE OF SURVEY	PROJECT DIMENSIONS		
	LEFT OUTSIDE QUARTER	LEFT INSIDE QUARTER	RIGHT INSIDE QUARTER	RIGHT OUTSIDE QUARTER		WIDTH (FEET)	LENGTH (MILES)	DEPTH (FEET)
CRAIGHILL ENTRANCE	45.0	50.0	51.0	47.0	5-12	700	3.79	50
CRAIGHILL CHANNEL	46.0	50.0	51.0	46.0	2-11	700	3.24	50

* ALL DEPTHS REPORTED TO NEAREST FOOT
 NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGES SUBSEQUENT TO THE ABOVE INFORMATION

SOUNDINGS IN FEET

12282

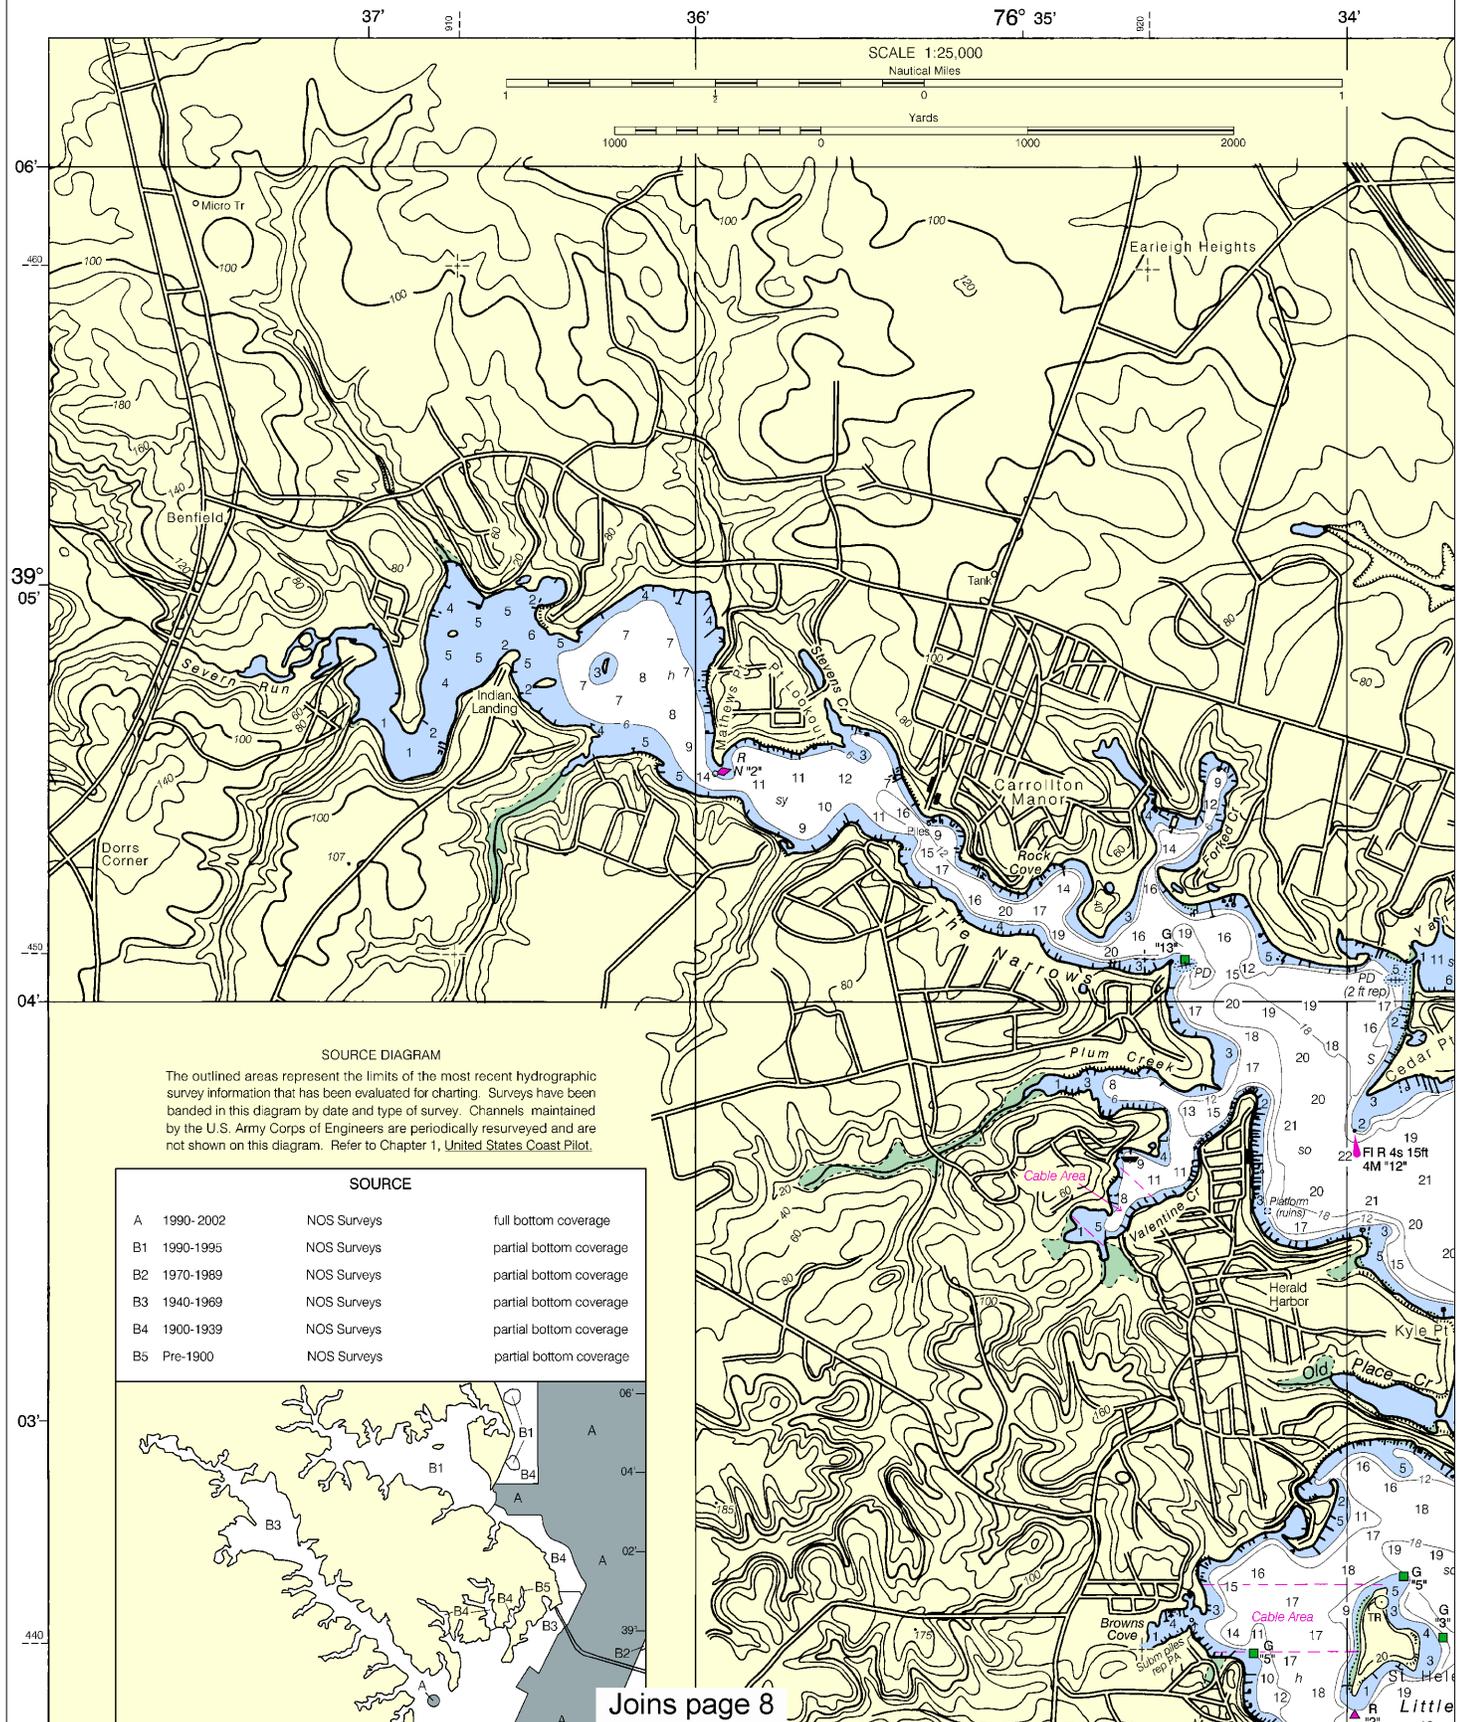


SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U. S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE

Source	Survey Period	Survey Type	Coverage
A	1990-2002	NOS Surveys	full bottom coverage
B1	1990-1995	NOS Surveys	partial bottom coverage
B2	1970-1989	NOS Surveys	partial bottom coverage
B3	1940-1969	NOS Surveys	partial bottom coverage
B4	1900-1939	NOS Surveys	partial bottom coverage
B5	Pre-1900	NOS Surveys	partial bottom coverage

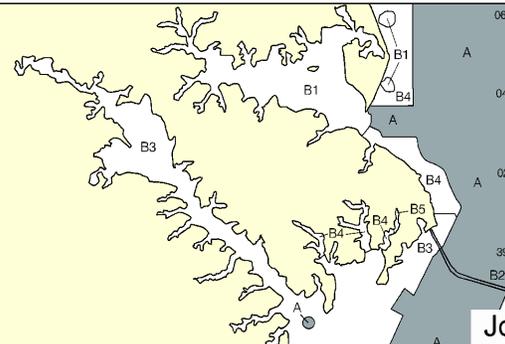


Joins page 8

4

Note: Chart grid lines are aligned with true north.

Printed at reduced scale. SCALE 1:25,000

See Note on page 5.





Joins page 5


Joins page 10




Note: Chart grid lines are aligned with true north.

Printed at reduced scale. SCALE 1:25,000


See Note on page 5.



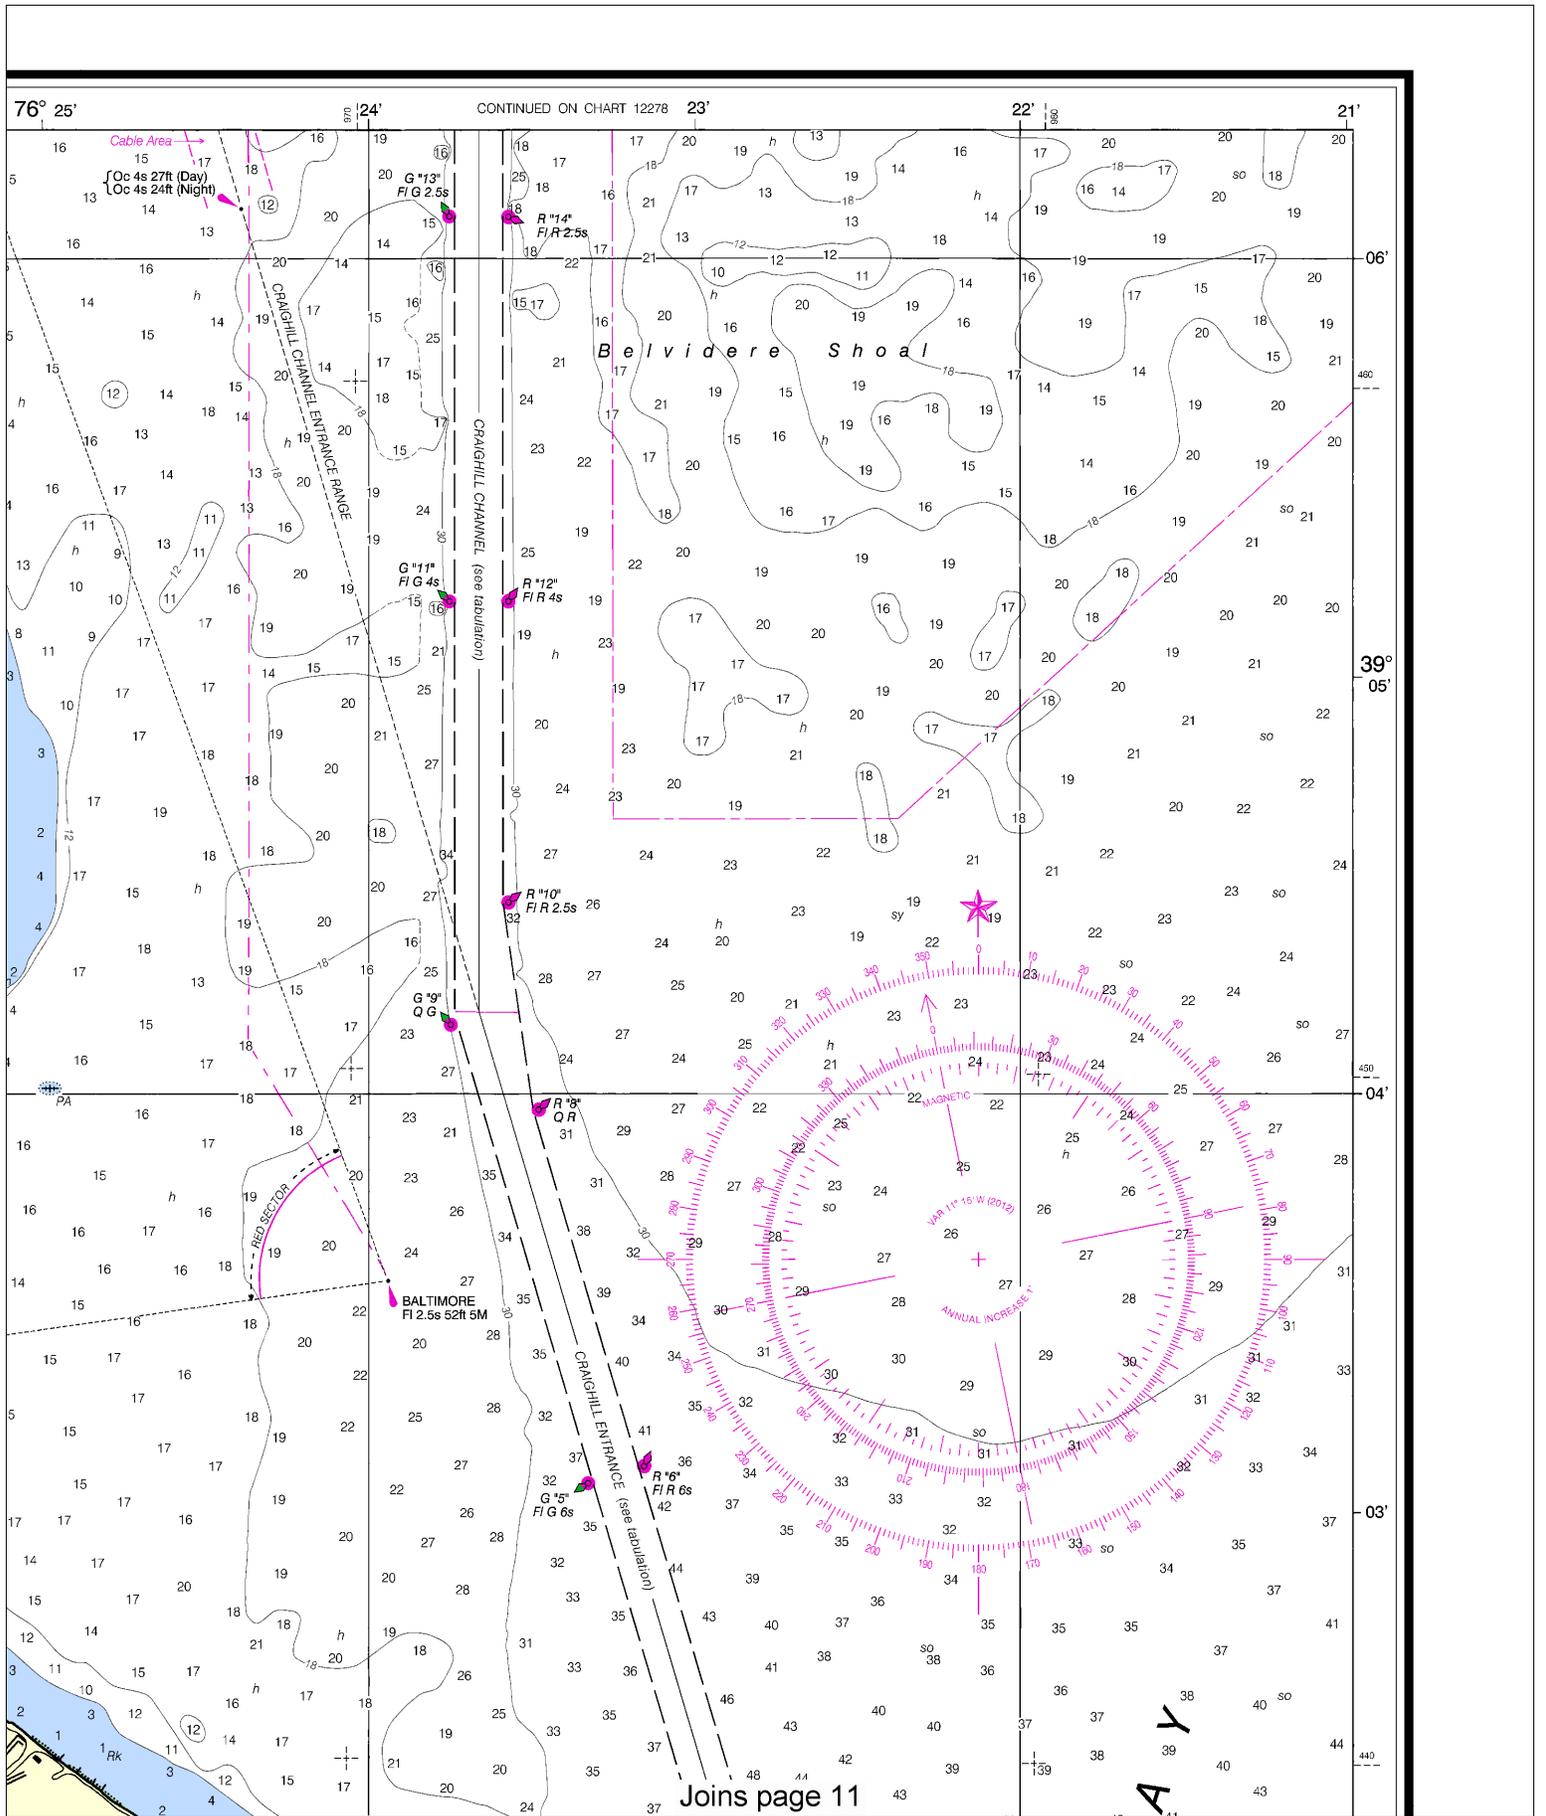

This BookletChart has been updated through: Coast Guard Local Notice To Mariners: 4812 11/27/2012,
 NGA Weekly Notice to Mariners: 4912 12/8/2012,
 Canadian Coast Guard Notice to Mariners: n/a.



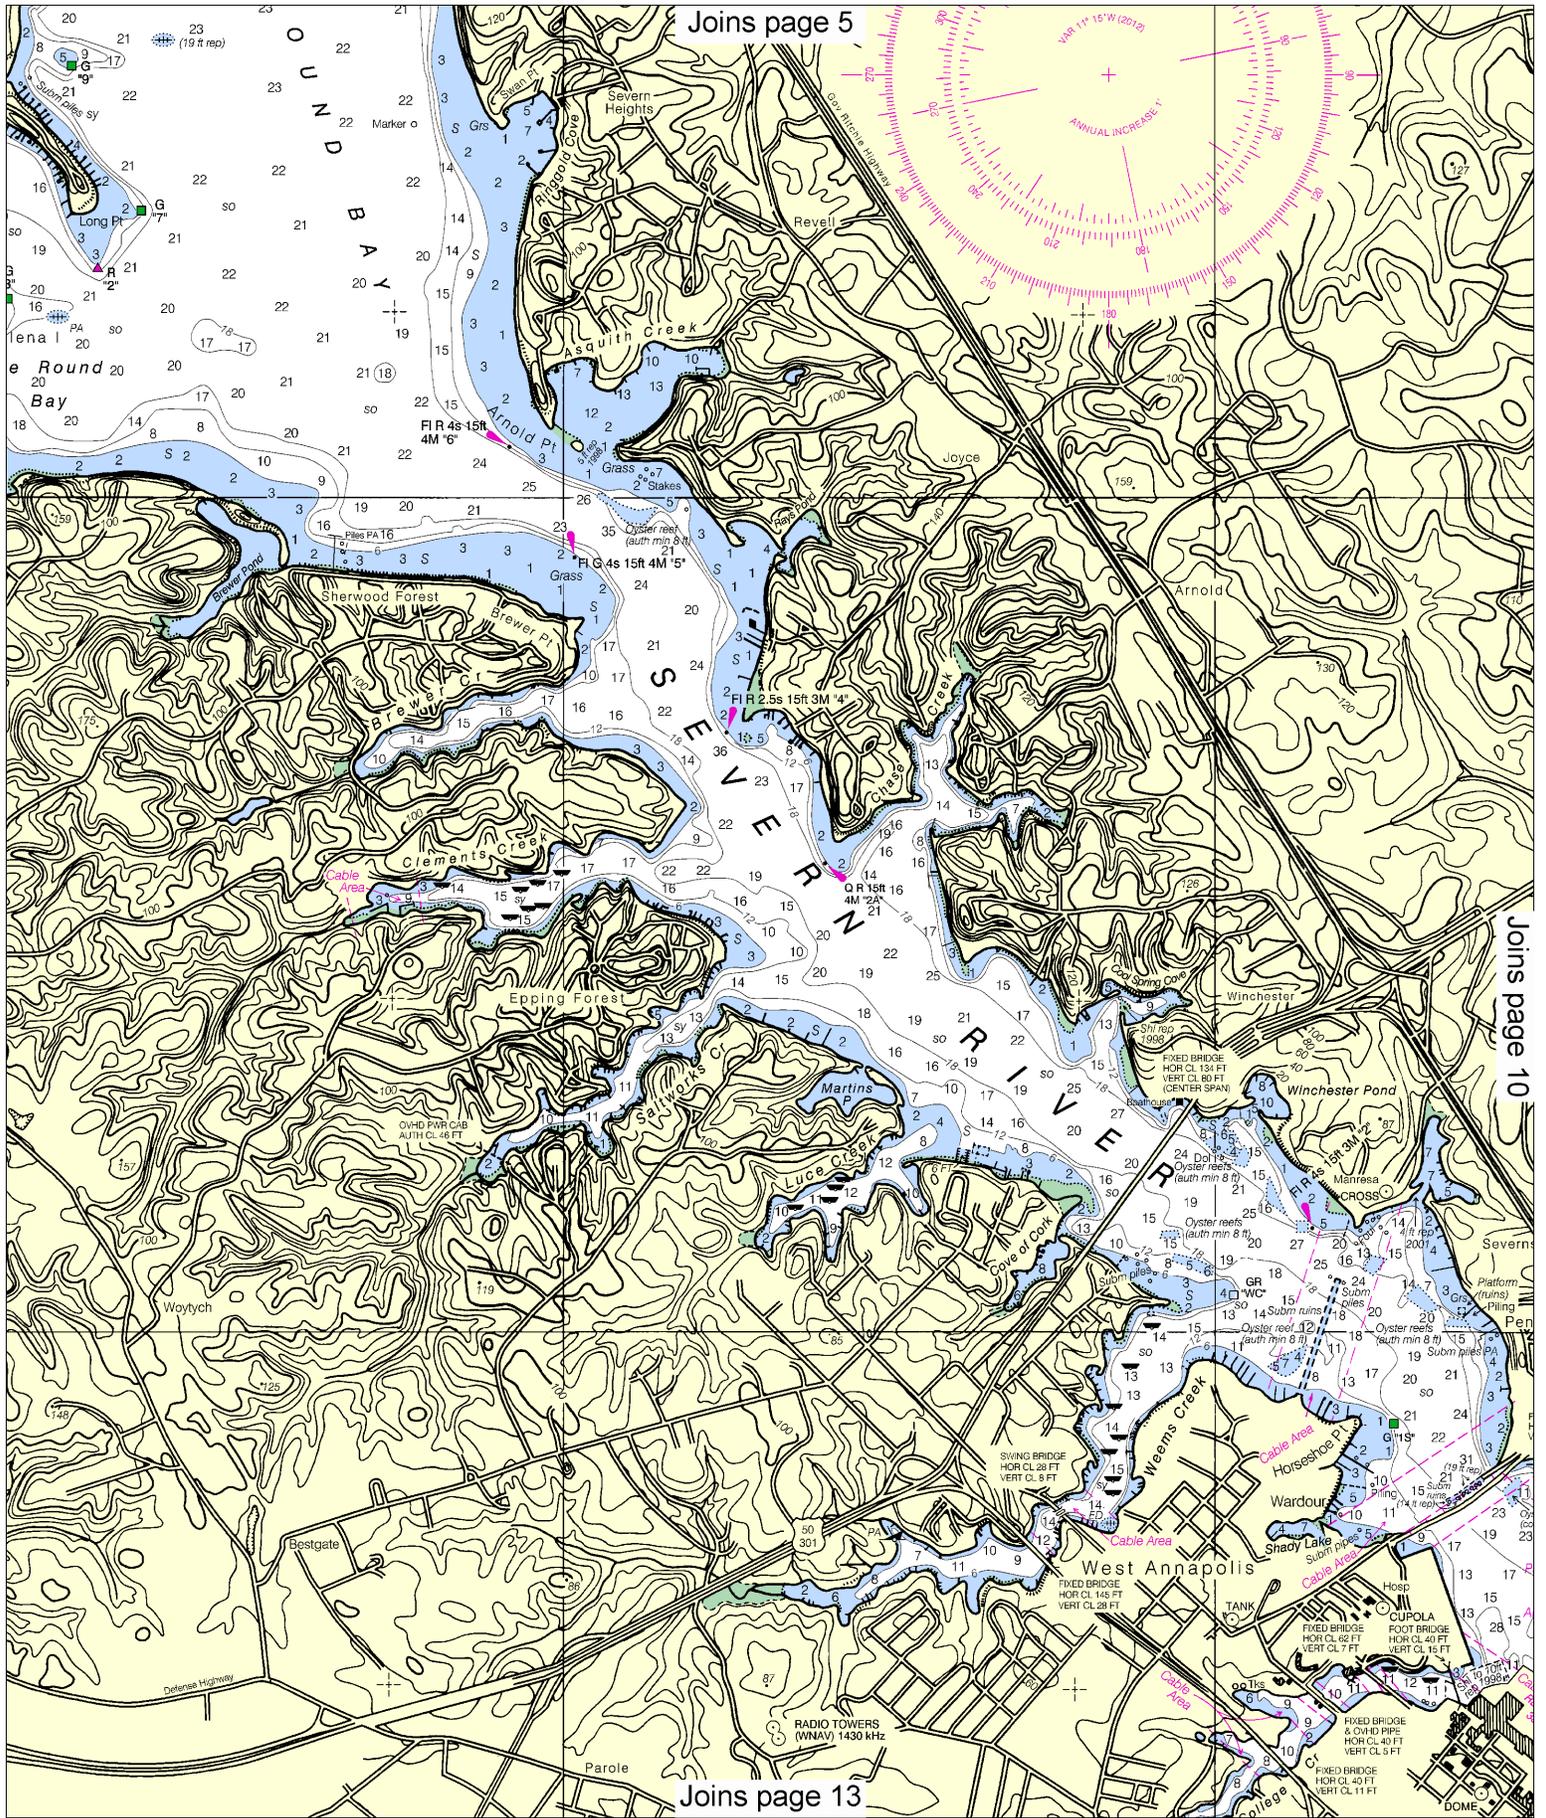



Joins page 6

Joins page 9


Joins page 14

Three fixed white
green range light
Fixed green range
channel span.
The north and
are marked by fi

10

Note: Chart grid lines are aligned with true north.

Printed at reduced scale. SCALE 1:25,000 See Note on page 5.





THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES - EAST COAST
MARYLAND

CHESAPEAKE BAY
SEVERN AND MAGOTHY RIVERS

Mercator Projection
Scale 1:25,000 at Lat. 39° 01'

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

Additional information can be obtained at nauticalcharts.noaa.gov.

TIDAL INFORMATION

NAME	PLACE (LAT/LONG)	Height referred to datum of soundings (MLLW)		
		Mean Higher High Water	Mean High Water	Mean Low Water
Annapolis	(38°59'N/76°29'W)	feet 1.4	feet 1.2	feet 0.2
Mountain Point	(39°04'N/76°26'W)	feet 1.2	feet 1.0	feet 0.2

Dashes (- -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from <http://tidesandcurrents.noaa.gov>. (May 2012)

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

- Aids to Navigation (lights are white unless otherwise indicated):
- AERO aeronautical
 - Al alternating
 - B black
 - Bn beacon
 - C can
 - DIA diaphone
 - F fixed
 - Fl flashing
 - G green
 - IQ interrupted quick
 - iso isophase
 - LT HO lighthouse
 - M nautical mile
 - m minutes
 - MICRO TR microwave tower
 - Mkr marker
 - Mo morse code
 - N nun
 - OBSC obscured
 - Oc occulting
 - Or orange
 - Q quick
 - R red
 - Ra Ref radar reflector
 - R Bn radiobeacon
 - R TR radio tower
 - Rot rotating
 - s seconds
 - SEC sector
 - S; M statute miles
 - VQ very quick
 - W white
 - WHIS whistle
 - Y yellow
- Bottom characteristics:
- Bds boulders
 - bk broken
 - Cy clay
 - Co coral
 - G gravel
 - Grs grass
 - gy gray
 - h hard
 - M mud
 - Oys oysters
 - Rk rock
 - S sand
 - so soft
 - Sh shells
 - sy sticky
- Miscellaneous:
- AUTH authorized
 - ED existence doubtful
 - Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
 - (2) Rocks that cover and uncover, with heights in feet above datum of soundings.
 - Obstm obstruction
 - PA position approximate
 - PD position doubtful
 - Rep reported
 - Subm submerged

HORIZONTAL DATUM
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.400" northward and 1.140" eastward to agree with this chart.

RADAR REFLECTORS
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

WARNING
The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

PLANE COORDINATE GRID
(based on NAD 1927)
The Maryland State Grid is indicated on this chart at 10,000 foot intervals thus: The last three digits are omitted.

HEIGHTS
Heights in feet above Mean High Water.


AUTHORITIES
Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

SUPPLEMENTAL INFORMATION
Consult U.S. Coast Pilot 3 for important supplemental information.

TABULATED
CONTROLLING DEPTHS FROM
NAME OF CHANNEL
CRAIGHILL ENTRANCE CRAIGHILL CHANNEL
* ALL DEPTHS REPORTED TO ME NOTE - CONSULT THE CORPS OF ENGINEERS

CAUTION
Limitations on the use of radio signals aids to marine navigation can be found in U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication. Radio direction-finder bearings to commercial broadcasting stations are subject to error should be used with caution. Station positions are shown thus: (Accurate location) (Approximate location)

SMALL CRAFT WARNINGS
During the boating season small-craft warnings will be displayed from sunrise to sunset on Maryland Marine Police Cruisers while underway in Maryland waters of Chesapeake Bay and tributaries.

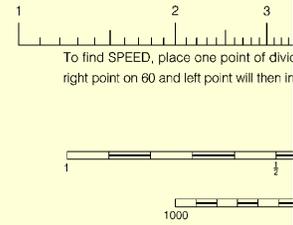

36th Ed., Jun. / 12 ■ Corrected through NM Jun. 9/12
Corrected through LNM May 29/12

12282

CAUTION


This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.


This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additional information, or comments to the Chief, Marine Chart Division (N/CS), U.S. Coast Guard, Silver Spring, Maryland 20910-3282.



Note: Chart grid lines are aligned with true north.

Printed at reduced scale. SCALE 1:25,000 See Note on page 5.



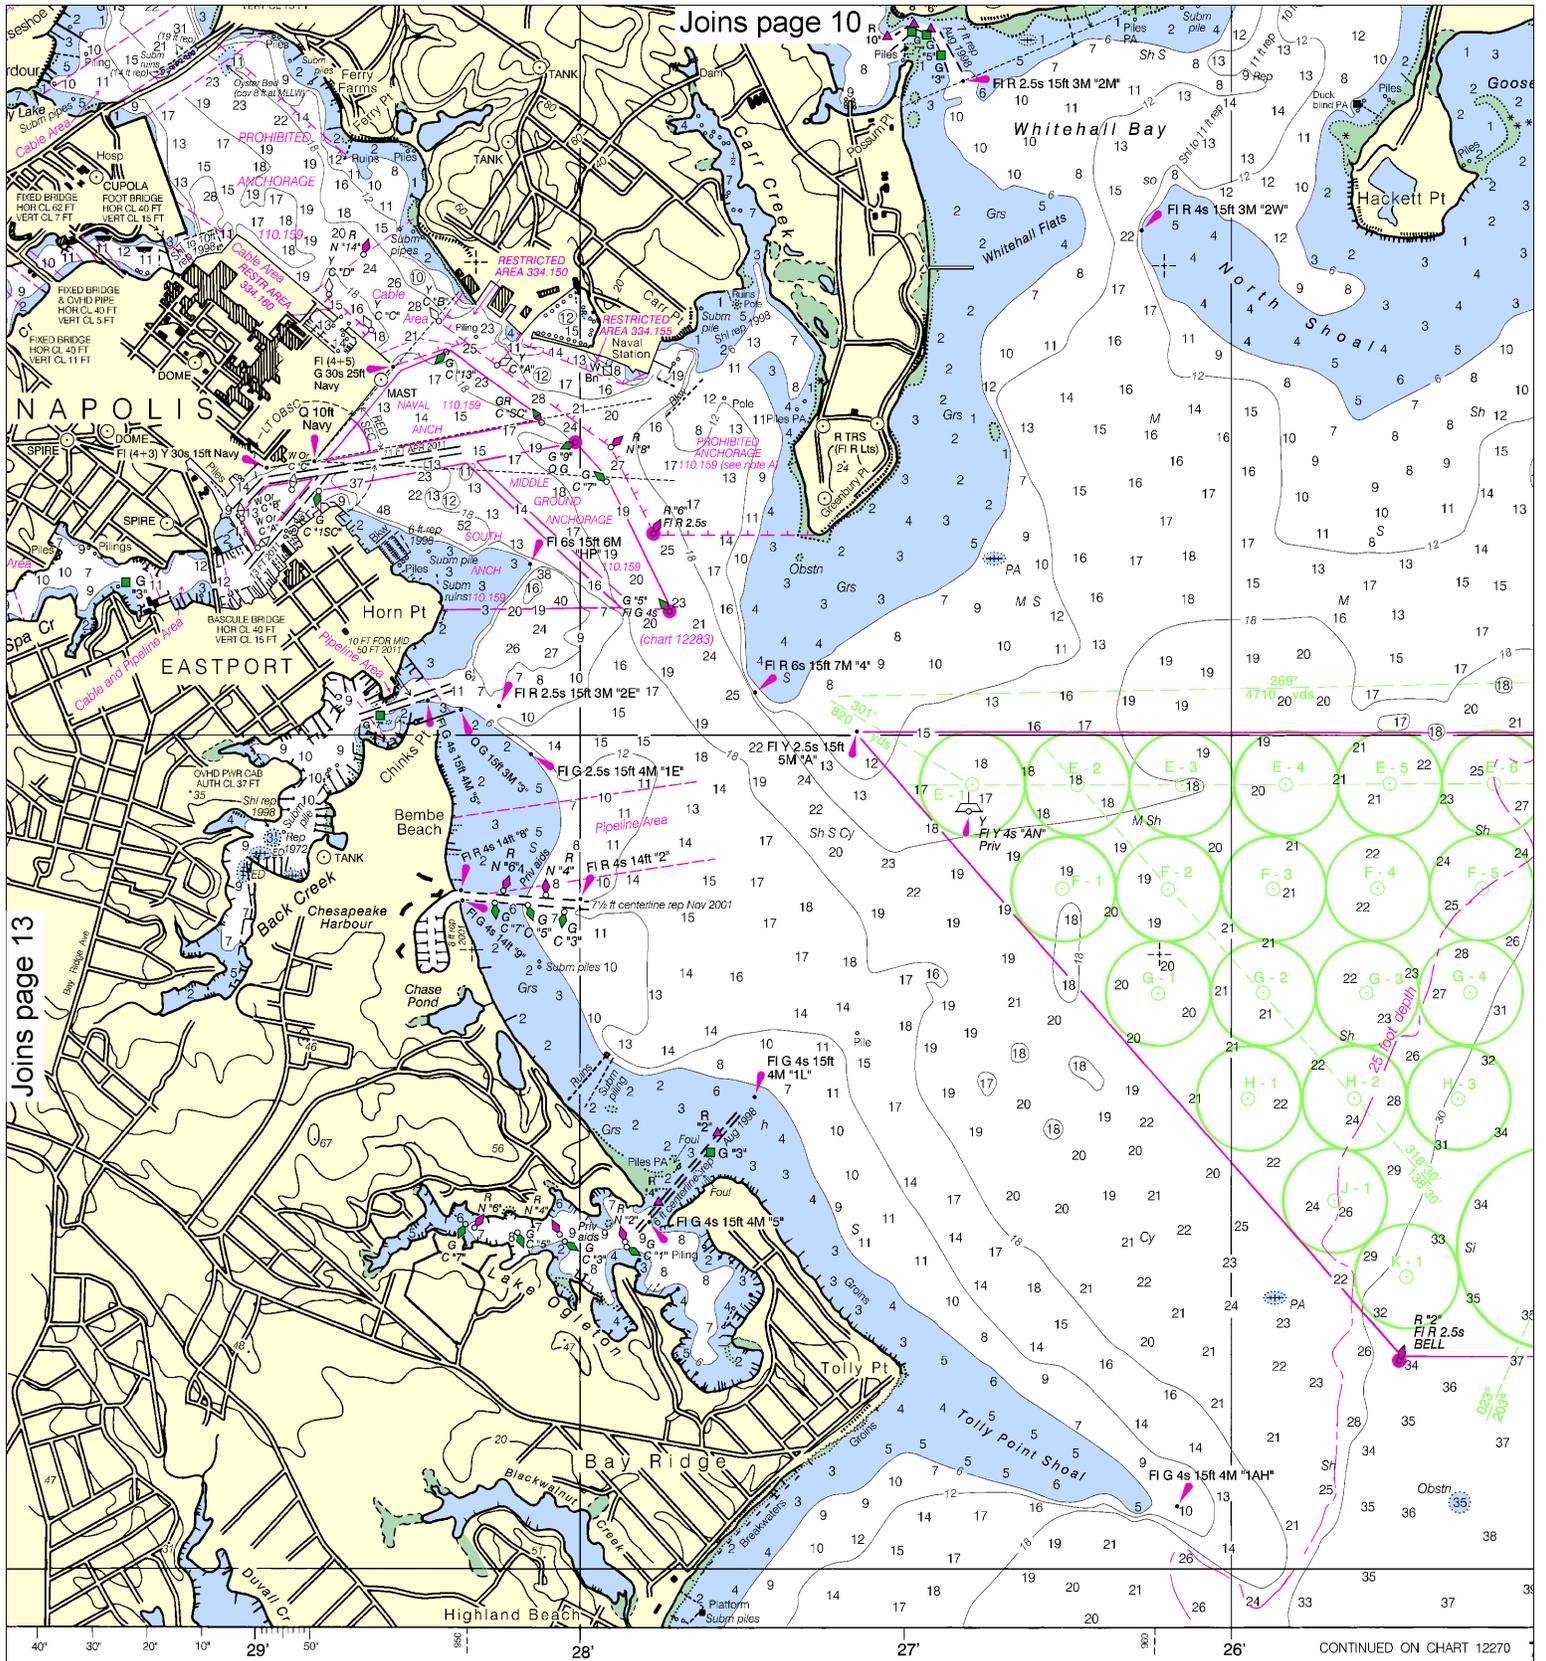

Published at Washington, D.C.
 DEPARTMENT OF COMMERCE
 NAUTICAL AND ATMOSPHERIC ADMINISTRATION
 NATIONAL OCEANIC SERVICE
 COAST SURVEY


SOUNDINGS IN FEET

FATHOMS	
FEET	
METERS	

14

Note: Chart grid lines are aligned with true north.

Printed at reduced scale. SCALE 1:25,000 See Note on page 5.





EMERGENCY INFORMATION

VHF Marine Radio channels for use on the waterways:

Channel 6 – Inter-ship safety communications.

Channel 9 – Communications between boats and ship-to-coast.

Channel 13 – Navigation purposes at bridges, locks, and harbors.

Channel 16 – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other vessels. Contact the other vessel, agree to another channel, and then switch.

Channel 22A – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here.

Channels 68, 69, 71, 72 and 78A – Recreational boat channels.

Getting and Giving Help — Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.

Distress Call Procedures

- Make sure radio is on.
- Select Channel 16.
- Press/Hold the transmit button.
- Clearly say: "MAYDAY, MAYDAY, MAYDAY."
- Also give: Vessel Name and/or Description; Position and/or Location; Nature of Emergency; Number of People on Board.
- Release transmit button.
- Wait for 10 seconds — If no response Repeat MAYDAY call.

HAVE ALL PERSONS PUT ON LIFE JACKETS!



NOAA Weather Radio All Hazards (NWR) is a nationwide network of radio stations broadcasting continuous weather information directly from the nearest National Weather Service office. NWR broadcasts official Weather Service warnings, watches, forecasts and other hazard information 24 hours a day, 7 days a week.

<http://www.nws.noaa.gov/nwr/>

Quick References

- Nautical chart related products and information — <http://www.nauticalcharts.noaa.gov>
- Online chart viewer — <http://www.nauticalcharts.noaa.gov/mcd/NOAChartViewer.html>
- Report a chart discrepancy — <http://ocsddata.ncd.noaa.gov/idrs/discrepancy.aspx>
- Chart and chart related inquiries and comments — <http://ocsddata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs>
- Chart updates (LNM and NM corrections) — http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html
- Coast Pilot online — <http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm>
- Tides and Currents — <http://tidesandcurrents.noaa.gov>
- Marine Forecasts — <http://www.nws.noaa.gov/om/marine/home.htm>
- National Data Buoy Center — <http://www.ndbc.noaa.gov/>
- NowCoast web portal for coastal conditions — <http://www.nowcoast.noaa.gov/>
- National Weather Service — <http://www.weather.gov/>
- National Hurricane Center — <http://www.nhc.noaa.gov/>
- Pacific Tsunami Warning Center — <http://ptwc.weather.gov/>
- Contact Us — <http://www.nauticalcharts.noaa.gov/staff/contact.htm>



— For the latest news from Coast Survey, follow @nauticalcharts



This Booklet chart has been designed for duplex printing (printed on front and back of one sheet). If a duplex option is not available on your printer, you may print each sheet and arrange them back-to-back to allow for the proper layout when viewing.

